


INDUSTRIAL COMPONENT DATA

1SAL103569R9902 ABB MC2A301AT1 Mini Contactor

Brand: ABB | Manufacturer Part Number: 1SAL103569R9902

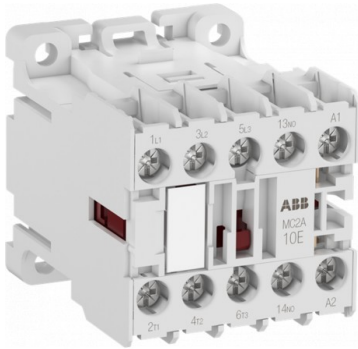

Manufacturer	ABB
MPN / Reference	1SAL103569R9902
Catalog number	103569
Category	Power contactor, AC switching
Minimum order	1 Pcs
Document ID	EO-41718EC2B2
Generated	2026-08-04

Product Overview

MC2A301AT1 Mini Contactor

The MC2A301AT1 mini contactor is a dimension optimized 3 pole contactor with 1 NC auxiliary contact and screw terminals. This device is a great solution when high performances are needed but the space is limited. Mini contactors are used in residential buildings, commercial buildings and industrial applications for the control of single or three-phase loads up to 5.5 kW (AC-3) and 20 A / 690 V (AC-1) or switching of control signals. The product is suitable for wall or rail mounting.

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	ABB > Contactors and overload relays
--------------	--------------------------------------

Additional Product Information

b'

General Information

Extended Product Type:MC2A301AT1Product ID:1SAL103569R9902EAN:4013614544194Catalog

Description:MC2A301AT1 Mini Contactor 3NO AUX 1NC 24V 50/60HzLong Description:The MC2A301AT1 mini contactor is a dimension optimized 3 pole contactor with 1 NC auxiliary contact and screw terminals. This device is a great solution when high performances are needed but the space is limited. Mini contactors are used in residential buildings, commercial buildings and industrial applications for the control of single or three-phase loads up to 5.5 kW (AC-3) and 20 A / 690 V (AC-1) or switching of control signals. The product is suitable for wall or rail mounting.

Ordering

Minimum Order Quantity:1 pieceCustoms Tariff Number:85365080Popular Downloads

Instructions and Manuals:\n2CDC103061M6801Dimensions

Product Net Width:45 mmProduct Net Height:48 mmProduct Net Depth / Length:56 mmProduct Net Weight:0.17 kgTechnical

Number of Poles:3Mini Contactor Type:Mini ContactorRated Operational Voltage:Auxiliary Circuit 690 V AC
Auxiliary Circuit 440 V DC
Main Circuit 690 V AC
Main Circuit 440 V DCRated Frequency (f):Auxiliary Circuit 50 Hz
Auxiliary Circuit 60 Hz
Auxiliary Circuit DC
Control Circuit 50 Hz
Control Circuit 60 Hz
Main Circuit 50 Hz
Main Circuit 60 Hz
Main Circuit DCRated Impulse Withstand Voltage (Uimp):Auxiliary Circuit 6 kV
Main Circuit 6 kVRated Insulation Voltage (Ui):750 VNumber of Main Contacts NC:0Number of Main Contacts NO:3Rated
Operational Current AC-1 (Ie):(690 V...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send ABB / 1SAL103569R9902 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.