


**INDUSTRIAL COMPONENT DATA**

# 2CCA703902R0001 ABB E219-90-10C3CDE Indicator light with 3 LEDs red, yellow, green 415/230

Brand: ABB | Manufacturer Part Number: 2CCA703902R0001

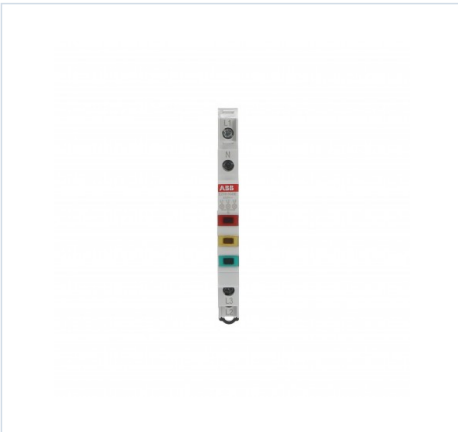

|                 |                                        |
|-----------------|----------------------------------------|
| Manufacturer    | ABB                                    |
| MPN / Reference | 2CCA703902R0001                        |
| Catalog number  | 703902                                 |
| Category        | Indicator light for distribution board |
| Minimum order   | 10 Pcs                                 |
| Document ID     | EO-425B1ADCA7                          |
| Generated       | 2026-08-03                             |

## Product Overview

E219-90-10C3CDE Indicator light with 3 LEDs red, yellow, green 415/230

Tricolor Pilot E219-3CDE 415/230Vac

Indicator Light, 16 A, 415 / 230 V AC, 3LED, Red / Yellow / Green, MW: 0.5

**STRUCTURED PRODUCT DATA**

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

|              |                                    |
|--------------|------------------------------------|
| Catalog path | ABB > Other modular devices > E210 |
|--------------|------------------------------------|

## Additional Product Information

Technical

Number of LEDs 3

Tightening Torque 1.2-1.5 N·m

Lamp Type LED

Switch Type Double Interrupting Contacts

Material of Conductor Copper

Remarks Sealable in the On and Off positions

Lamp Color Red / Yellow / Green

Connecting Capacity Solid 1x1...6 mm<sup>2</sup>

Solid 2x2.5 mm<sup>2</sup>

Flexible 1x0.75...2x2.5 mm<sup>2</sup>

Service Life LED Indicator 50000 hour

Electrical

Short-Circuit Current Rating (SCCR) 3 kA  
Rated Voltage (Ur) 230 V  
Rated Operational Voltage 415 / 230 V AC  
Rated Insulation Voltage (Ui) 250 V  
Voltage Range 230 ... 415 V AC  
Rated Impulse Withstand Voltage (Uimp) 4 kV  
Auxiliary Voltage AC/DC LED Indicator 230...415 V AC  
Input Voltage Type AC  
Rated Current (In) 16 A  
Rated Frequency (f) 50/60 Hz  
Power Loss Total 0.47-1 W  
Power Watt 1.2 W  
Design  
Color Red, yellow, green  
Material Compliance  
RoHS Declaration 2CCC441015D0201  
RoHS Information Following EU Directive 2011/65/EU and Amendment 2015/863 July 22, 2019  
RoHS Date 20170426  
REACH Declaration 2CCC005047D0201  
REACH Information False - does not contain substances > 0.1 mass percentage  
REACH Date 20190425  
Conflict Minerals Reporting Template (CMRT) 9AKK108468A3363  
WEEE Category 5. Small Equipment (No External Dimension More Than 50 cm)  
WEEE B2C / B2B Business To Consumer  
Environmental  
Ambient Air Temperature Operation -25...+55 °C  
Storage -40...+70 °C  
Degree of Protection IP20  
Environmental Information 2CCC441002C0201  
Dimensions  
Width in Number of Modular Spacings 0.5  
Product Net Width 9 mm  
Product Net Height 85 mm  
Product Net Depth / Length....

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send ABB / 2CCA703902R0001 with the required quantity to [info@electricaonline.com](mailto:info@electricaonline.com) or use [electricaonline.com/request-quote](https://electricaonline.com/request-quote).

### GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.