


## INDUSTRIAL COMPONENT DATA

## Y4373 BTCINO LW-DIFFUS HOTEL 1M

Brand: BTCINO | Manufacturer Part Number: Y4373

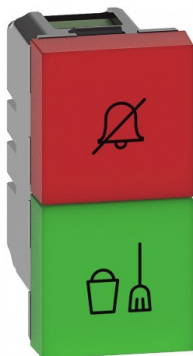

|                 |                                                         |
|-----------------|---------------------------------------------------------|
| Manufacturer    | BTICINO                                                 |
| MPN / Reference | Y4373                                                   |
| Catalog number  | Y4373                                                   |
| Category        | Information light signal for domestic switching devices |
| Minimum order   | 1 Pcs                                                   |
| Document ID     | EO-3B7E5AB5D4                                           |
| Generated       | 2026-07-29                                              |

## Product Overview

LW-DIFFUS HOTEL 1M

Light Now Exterior Door Indicator - Green and Red Diffusers - 1 Module

## STRUCTURED PRODUCT DATA

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification &amp; Catalog Path

Catalog path BTICINO &gt; MATIX MECHANISMS

## Additional Product Information

Light signalers - With 2 diffusers: green and red - With integrated LEDs - To be combined with support and decorative plate - 230Vac - Install with double YW/YD/YG4027HN switches - 1 module.Type of mounting Complete device, Recessed mounted (plaster)

Number of modules (in case of modular design) 1

Lamp holder none

With light source Yes

Lamp Non-interchangeable LED

With flashing light No

With fixed symbol/printing No

With interchangeable symbol No

Can be used as a pushbutton No

Attachment Type Lock in position

Material Plastic

Material quality Thermoplastic

Halogen-free Yes

Surface treatment No treatment  
Surface Finish Mate  
Colour Grey  
RAL number (similar) 7030  
Transparent No  
Lamp color Red/Green  
Suitable for protection grade (IP) IP20  
Nominal Voltage 230 V  
Lamp power max. 0.5 W  
Device width 22.5 mm  
Device height 45 mm  
Device Depth 38 mm  
Min. depth of the recessed box 40 mm  
Installation Depth 30 mm  
Impact resistance IK04  
Operating Temperature -5-35 °C  
Storage temperature -10-70 °C  
Type of voltage AC  
frequency 50-60 Hz  
Neutral Mandatory No  
Display of markings on the connection terminals No  
Compliant with commissioning tests (1000 V) No  
Antibacterial treatment No  
Connection Method Screw-on terminal  
Terminal capacity 1.5-2.5 mm<sup>2</sup>  
Connection Cable Type Flexible or rigid  
Core cross-section 1.5-2.5 mm<sup>2</sup>  
Label Space/Print Area No  
ETIM for Y4373 Domestic wiring accessories and controls (EC000064)  
Feature Name  
Feature Value  
Max. lamp power (EF000260)  
0.5 W  
Material (EF002169)  
Plastic  
Su...

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send BTICINO / Y4373 with the required quantity to [info@electricaonline.com](mailto:info@electricaonline.com) or use [electricaonline.com/request-quote](https://electricaonline.com/request-quote).

### GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.