


INDUSTRIAL COMPONENT DATA

**BFZ-TS-N/PE-KL29 113702 Y7-113702 EATON ELECTRIC
Terminal-Set PE/N max. 63A 2x (2x25mm² + 27x16mm²)**

Brand: EATON - MOELLER | Manufacturer Part Number: BFZ-TS-N/PE-KL29

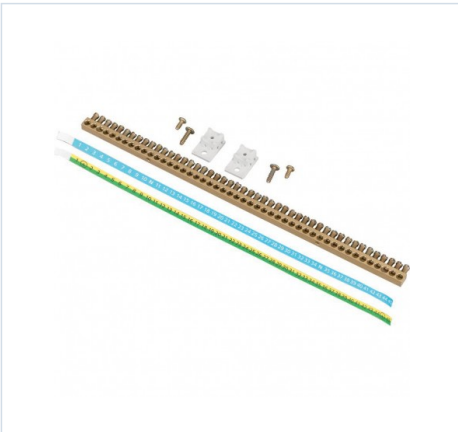

Manufacturer	EATON - MOELLER
MPN / Reference	BFZ-TS-N/PE-KL29
Catalog number	Y7-113702
Category	Rail terminal bar
Minimum order	1 Pcs
Document ID	EO-0D1DB7872C
Generated	2026-08-06

Product OverviewTerminal-Set PE/N max. 63A 2x (2x25mm² + 27x16mm²)

BFZ-TS-N/PE-KL29

Eaton xComfort BF LV systems Final Distribution Boards. Terminal-Set PE/N max. 63A 2x (2x25mm² + 27x16mm²)

Terminal set for PE/N connection inside flat distribution board BF-O / BF-U, incl. labeling strips, fixing accessories and insulation parts

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path EATON - MOELLER > Connection Accessories for Enclosures

Additional Product Information

General specifications

Product Name Eaton xComfort BF other accessory Catalog Number 113702 Model Code BFZ-TS-N/PE-KL29 EAN

4015081132300 Product Length/Depth 15 mm Product Height 220 mm Product Width 50 mm Product Weight 0.26 kg

Compliances RoHS conform Delivery program

Type Accessory/spare part type BF Nominal current 63 A Number of poles Two-pole Technical data - mechanical

Mounting method Screw Number of connections (10 mm squared) 0 Number of connections (16 mm squared) 27 Number

of connections (25 mm squared) 2 Number of connections (250 kcmil) 0 Number of connections (Less Than 6 mm squared)

0 Number of connections (Less Than AWG 6) 0 Number of connections (Greater Than 25 mm squared) 0 Number of

connections (Greater Than 250 kcmil) 0 Number of connections (AWG 2) 0 Number of connections (AWG 4) 0 Number of

connections (AWG 4/0) 0 Number of connections (AWG 6) 0 Number of connections (total) 29 Number of inputs 2 Number

of outputs 27 Connection type Clamp

Screwing Conductor cross section, input - min 1.5 mm² Conductor cross section, input - max 16 mm² Conductor cross section, input AWG - min 0 mm² Conductor cross section, input AWG - max 0 mm² Conductor cross section, output - min 1.5 mm² Conductor cross section, output - max 16 mm² Conductor cross section, output AWG - min 0 mm² Conductor cross section, output AWG - max 0 mm² Additional information

Functions Additional equipment Suitable for Fine strand conductors

Solid conductors

Stranded conductors Used with PE/neu...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send EATON - MOELLER / BFZ-TS-N/PE-KL29 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.