


INDUSTRIAL COMPONENT DATA

ZV-KSBI-5TE/N 263966 Y7-263966 EATON ELECTRIC Busbars, for SPC, 5HP

Brand: EATON - MOELLER | Manufacturer Part Number: ZV-KSBI-5TE/N

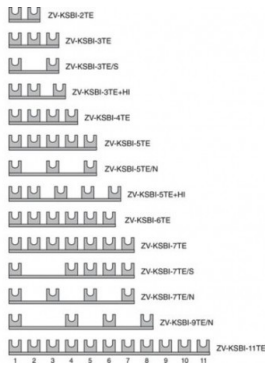

Manufacturer	EATON - MOELLER
MPN / Reference	ZV-KSBI-5TE/N
Catalog number	Y7-263966
Category	Phase busbar
Minimum order	1 Pcs
Document ID	EO-641B322047
Generated	2026-08-04

Product Overview

Busbars, for SPC, 5HP

ZV-KSBI-5TE/N

Eaton Distribution parts. Busbars, for SPC, 5HP, N

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path EATON - MOELLER > Modular Switchgear - Others and Accessories

Additional Product Information

General specifications

Product Name Eaton Distribution parts Catalog Number 263966 Model Code ZV-KSBI-5TE/N EAN 4015082639662 Product Length/Depth 87.5 mm Product Height 15 mm Product Width 18 mm Product Weight 0.525 kg Compliances RoHS conform

Product specifications

Features Insulated

Can be cut to size Electric connection type Fork Rated surge voltage 0 KV Rated uninterrupted current (Iu) 0 A Suitable for number of devices 0 Number of poles Single-pole Color Other Rated short-time withstand current (Icw) 0 kA Cross section 16 mm² Number of modular spacings 5 Number of phases 1 Pitch dimensions 0 mm Rated operational voltage (Ue) - max 400 V Rated conditional short-circuit current (Iq) 0 kA

ETIM for 263966 Low-voltage industrial controls and switchgear (EC000215)

Feature Name

Feature Value

Number of phases (EF000351)

1
Number of poles (EF001391)
1
Suitable for number of devices (EF007241)
0
Module width (EF007504)
0 mm
Cross section (EF000649)
16 mm²
Length (EF001438)
87.5 mm
Can be cut to size (EF015250)
Yes
Width in number of modular spacings (EF002950)
5
Rated permanent current I_u (EF001389)
0 A
Type of electric connection (EF003961)
Fork
Insulated (EF000019)
Yes
Rated surge voltage (EF002993)
0 kV
Conditioned rated short-circuit current I_q (EF001444)
0 kA
Max. rated operation voltage U_e (EF007357)
400 V
Rated short-time withstand current I_{cw} (EF007050)
0 kA
Suitable for devices with N-conductor (EF007218)
No
Suitable for devices with auxiliary switch (EF007217)
No
Colou...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send EATON - MOELLER / ZV-KSBI-5TE/N with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.