


INDUSTRIAL COMPONENT DATA

ZV-KSBI-7TE/S 263968 Y7-263968 EATON ELECTRIC Busbars, for SPC, 7HP

Brand: EATON - MOELLER | Manufacturer Part Number: ZV-KSBI-7TE/S

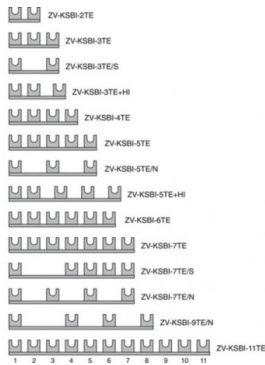

Manufacturer	EATON - MOELLER
MPN / Reference	ZV-KSBI-7TE/S
Catalog number	Y7-263968
Category	Phase busbar
Minimum order	1 Pcs
Document ID	EO-A5E793FDF7
Generated	2026-08-03

Product Overview

Busbars, for SPC, 7HP

ZV-KSBI-7TE/S

Eaton Distribution parts. Busbars, for SPC, 7HP, S

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path EATON - MOELLER > Modular Switchgear - Others and Accessories

Additional Product Information

General specifications

Product Name Eaton Distribution parts Catalog Number 263968 Model Code ZV-KSBI-7TE/S EAN 4015082639686 Product Length/Depth 122.5 mm Product Height 15 mm Product Width 18 mm Product Weight 0.077 kg Compliances RoHS conform Product specifications

Features Can be cut to size Electric connection type Fork Rated surge voltage 0 KV Rated uninterrupted current (Iu) 0 A Suitable for number of devices 0 Number of poles Single-pole Color Other Rated short-time withstand current (Icw) 0 kA Cross section 16 mm² Number of modular spacings 7 Number of phases 1 Pitch dimensions 0 mm Rated operational voltage (Ue) - max 400 V Rated conditional short-circuit current (Iq) 0 kA

ETIM for 263968 Low-voltage industrial controls and switchgear (EC000215)

Feature Name

Feature Value

Number of phases (EF000351)

1

Number of poles (EF001391)

1

Suitable for number of devices (EF007241)

0

Module width (EF007504)

0 mm

Cross section (EF000649)

16 mm²

Length (EF001438)

122.5 mm

Can be cut to size (EF015250)

Yes

Width in number of modular spacings (EF002950)

7

Rated permanent current I_u (EF001389)

0 A

Type of electric connection (EF003961)

Fork

Insulated (EF000019)

No

Rated surge voltage (EF002993)

0 kV

Conditioned rated short-circuit current I_q (EF001444)

0 kA

Max. rated operation voltage U_e (EF007357)

400 V

Rated short-time withstand current I_{cw} (EF007050)

0 kA

Suitable for devices with N-conductor (EF007218)

No

Suitable for devices with auxiliary switch (EF007217)

No

Colour (EF0000...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send EATON - MOELLER / ZV-KSBI-7TE/S with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.