


INDUSTRIAL COMPONENT DATA

M22-XDLH-R 216448 Y7-216448 EATON ELECTRIC Button lens, raised red, blank

Brand: EATON - MOELLER | Manufacturer Part Number: M22-XDLH-R

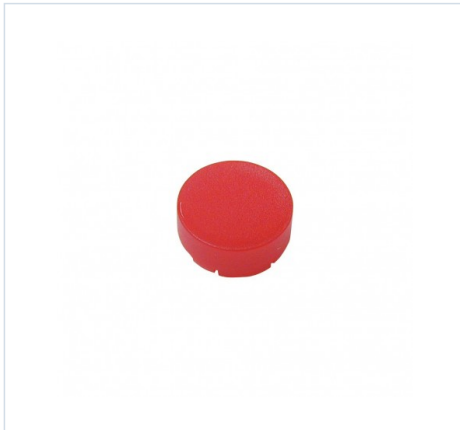

Manufacturer	EATON - MOELLER
MPN / Reference	M22-XDLH-R
Catalog number	Y7-216448
Category	Hood/lens for circuit control devices
Minimum order	1 Pcs
Document ID	EO-946A9984AF
Generated	2026-08-05

Product Overview

Button lens, raised red, blank

M22-XDLH-R

Eaton Moeller® series M22 Button lens, raised red, blank

Button lens, Product range: Accessories, Single unit, Description: 5 characters: letter height 5 mm, > 5 characters: letter height 3 mm, Design: Extended, Selection to: Blank, For use with: M22(S)-DL-X, M22(S)-DRL-X, M22S-DGL-X, M30C-FDL-X, M30C-FDRL-X, Connection to SmartWire-DT: no

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	EATON - MOELLER > Auxiliary Control and Signalling Elements
--------------	---

Additional Product Information

General specifications

Product Name Eaton Moeller® series M22 Accessory Button lens Catalog Number 216448 Model Code M22-XDLH-R EAN 4015082164485 Product Length/Depth 24 mm Product Height 9 mm Product Width 24 mm Product Weight 0.002 kg

Certifications UL/CSA certification not required Features & Functions

Design Extended

High Inscription Individual inscription possible: <= 5 characters: letter height 5 mm

Individual inscription possible: > 5 characters: letter height 3 mm Inscription type Blank Lens color Red General

Product category Accessories Type Button lenses Used with M22(S)-DR-X

M22-DG-X

M22(S)-D-X Climatic environmental conditions

Ambient operating temperature - min -25 °C Ambient operating temperature - max 70 °C Communication
Connection to SmartWire-DT No Design verification
Equipment heat dissipation, current-dependent P_{vid} 0 W Heat dissipation capacity P_{diss} 0 W Heat dissipation per pole,
current-dependent P_{vid} 0 W Rated operational current for specified heat dissipation (I_n) 0 A Static heat dissipation,
non-current-dependent P_{vs} 0 W 10.2.2 Corrosion resistance Meets the product standard's requirements. 10.2.3.1
Verification of thermal stability of enclosures Meets the product standard's requirements. 10.2.3.2 Verification of resistance
of insulating materials to normal heat Meets the product standard's requirements. 10.2.3.3 Resist. of insul. mat. to abnormal
heat/fire by internal elect. effects Meets the product standard's requirements. 10.2.4 Resistance to ultr...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send EATON - MOELLER / M22-XDLH-R with the required quantity to info@electricaonline.com or use
electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd
Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification
requirements against the manufacturer documentation before purchase or installation.