


INDUSTRIAL COMPONENT DATA

**DILP315/22(220-230V50HZ) 207460 XTCFA315M22F EATON
ELECTRIC Contactor, 4p+2N/O+2N/C, 315A/AC1**

Brand: EATON - MOELLER | Manufacturer Part Number: DILP315/22(220-230V50HZ)

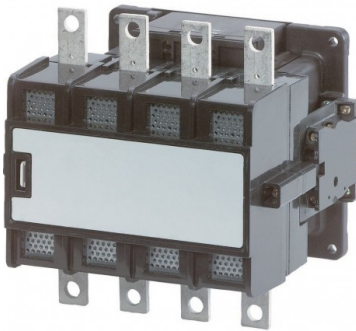

Manufacturer	EATON - MOELLER
MPN / Reference	DILP315/22(220-230V50HZ)
Catalog number	XTCFA315M22F
Category	Power contactor, AC switching
Minimum order	1 Pcs
Document ID	EO-85E3AB0F89
Generated	2026-08-06

Product Overview

Contactor, 4p+2N/O+2N/C, 315A/AC1

Power contactor 4 poles + 2 NO + 2 NC 315 A AC-1 220-230V50HZ

Contactor, 4 pole, 315 A, 2 N/O, 2 NC, 220 V 50 Hz, 230 V 50 Hz, AC operation, Screw terminals

Contactor, Application: Contactors for 4 pole electric consumers, Contactors larger than 200 A, 4 pole, Utilization category:

AC-1: Non-inductive or slightly inductive loads, resistance furnaces, Connection technique: Screw terminals, Number of poles: 4 pole, Rated operational current AC-1 Conventional free air thermal current, 3 pole, 50 - 60 Hz Open at 40 °C: $I_{th} = I_e = 315$ A, Rated operational current AC-1 Conventional free air thermal current, 1 pole open: $I_{th} = 880$ A, Rated operational current AC-1 220 V 230 V: $P = 59$ kW, 380 V 400 V: $P = 110$ kW, 660 V 690 V: $P = 160$ kW, Contacts N/O = Normally open: 2 N/O, Contacts N/C = Normally closed: 2 NC, Voltage AC/DC: AC operation

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path EATON - MOELLER > Contactors more than 170 A

Additional Product Information

Contactor, 4 pole, 315 A, 2 N/O, 2 NC, 220 V 50 Hz, 230 V 50 Hz, AC operation, Screw terminals

Contactor, Application: Contactors for 4 pole electric consumers, Contactors larger than 200 A, 4 pole, Utilization category: AC-1: Non-inductive or slightly inductive loads, resistance furnaces, Connection technique: Screw terminals, Number of poles: 4 pole, Rated operational current AC-1 Conventional free air thermal current, 3 pole, 50 - 60 Hz Open at 40 °C: $I_{th} = I_e = 315$ A, Rated operational current AC-1 Conventional free air thermal current, 1 pole open: $I_{th} = 880$ A, Rated operational current AC-1 220 V 230 V: $P = 59$ kW, 380 V 400 V: $P = 110$ kW, 660 V 690 V: $P = 160$ kW, Contacts N/O = Normally open: 2 N/O, Contacts N/C = Normally closed: 2 NC, Voltage AC/DC: AC operation

Delivery program

Product range: Contactors
Application: Contactors for 4 pole electric consumers
Subrange: Contactors larger than 200 A, 4 pole
Utilization category: AC-1: Non-inductive or slightly inductive loads, resistance furnaces
Connection technique: Screw terminals
Number of poles: 4 pole
Rated operational current: AC-1
Conventional free air thermal current, 3 pole, 50 - 60 Hz
Open at 40 °C [$I_{th}=I_e$] 315 A
AC-1
Conventional free air thermal current, 3 pole, 50 - 60 Hz
Open at 55 °C [$I_{th}=I_e$] 270 A
AC-1
Conventional free air thermal current, 3 pole, 50 - 60 Hz
Open at 60 °C [$I_{th}=I_e$] 215 A
AC-1
Conventional free air thermal current, 1 pole
open [I_{th}] 880 A
Contacts: N/O = Normally open, 2 N/ON/C = Normally closed, 2 NC
Contact sequence: For use with DILP800-XHI.....

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send EATON - MOELLER / DILP315/22(220-230V50HZ) with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.