


INDUSTRIAL COMPONENT DATA

DILK12-11(380V50/60HZ) 293996 XTCC012C11AR EATON ELECTRIC Contactor for 3-phase/three-phase capacitors, 12.5..

Brand: EATON - MOELLER | Manufacturer Part Number: DILK12-11(380V50/60HZ)

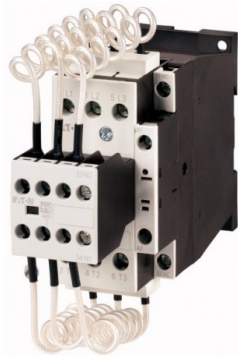

Manufacturer	EATON - MOELLER
MPN / Reference	DILK12-11(380V50/60HZ)
Catalog number	XTCC012C11AR
Category	Capacitor contactor
Minimum order	1 Pcs
Document ID	EO-D4E18F737C
Generated	2026-08-04

Product Overview

Contactor for 3-phase/three-phase capacitors, 12.5kVAR

Capacitor contactor; Connection; screw; 3 poles; 12.5 KVar; 400 V; 380 V 50/60 Hz

Contactor for capacitors, with series resistors, 12.5 kVar, 380 V 50/60 Hz

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	EATON - MOELLER > Contactors up to 170A
--------------	---

Additional Product Information

Contactor for capacitors, with series resistors, 12.5 kVar, 380 V 50/60 HzFor switching in central compensation systems with 180-fold transient peaks. The capacitors are pre-charged via the early-make auxiliary contacts and the fitted wire resistors, thus reducing the inrush current.Delivery program

Product rangeDILK Contactors for capacitorsApplicationContactors for power factor correctionDescriptionwith series resistorsRated power of AC-6b three-phase capacitors, 50 - 60 HzOpen230 V [Q]7.5 kVarOpen400 V [Q]12.5 kVarOpen525 V [Q]16.7 kVarOpen690 V [Q]20 kVarContact sequenceActuating voltage380 V 50/60 HzInstructionsIn the case of group compensation multi-stage capacitor banks are connected to the mains, as required. Transient currents of up to $180 \times I_e$ could flow between the capacitors.

The capacitors are pre-charged via the early-make auxiliary contacts and the fitted wire resistors, thereby reducing the inrush current. The main contacts then close in a time-delayed manner and bring about the continuous current. Due to their special contacts, the contactors for the capacitors are weld-resistant for capacitors with inrush current peaks

Due to their special contacts, the contactors for capacitors are weld-resistant for capacitors with inrush current peaks up to $180 \times I_e$. Technical data

General Standards IEC/EN 60947 Ambient temperature Open-25 - +60 °C Ambient temperature Enclosed- 25 - 40 °C Mounting position Degree of Protection IP00 Protection against direct contact when actuated fr...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send EATON - MOELLER / DILK12-11(380V50/60HZ) with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.