


INDUSTRIAL COMPONENT DATA

Z-SV-16/2P+2N-2TE 264914 Y7-264914 EATON ELECTRIC

Phase busbar, 3-phases, 16qmm, pin, 1m

Brand: EATON - MOELLER | Manufacturer Part Number: Z-SV-16/2P+2N-2TE

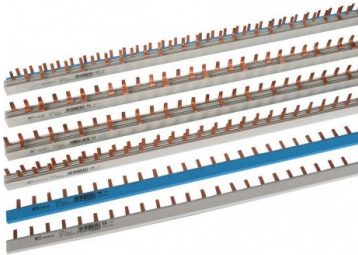

Manufacturer	EATON - MOELLER
MPN / Reference	Z-SV-16/2P+2N-2TE
Catalog number	Y7-264914
Category	Phase busbar
Minimum order	1 Pcs
Document ID	EO-037C725F80
Generated	2026-08-04

Product Overview

Phase busbar, 3-phases, 16qmm, pin, 1m

Z-SV-16/2P+2N-2TE

Block busbar for PLN. (1 space units), Z-SI, supplied without end caps

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog pathEATON - MOELLER > Modular Switchgear - Others and Accessories

Additional Product Information

Phase busbar, 3-phases, 16qmm, pin, 1mBlock busbar for PLN. (1 space units), Z-SI, supplied without end capsTechnical data ETIM 7.0

Low-voltage industrial components (EG000017) / Phase busbar (EC000215)Electric engineering, automation, process control engineering / Low-voltage switch technology / Component for low-voltage switching technology / Phase busbar ( [ACN992011])Number of phases3Number of poles2Suitable for number of devices56Pitch dimensions17.95 mmCross section16 mm²Length1000 mmNumber of modular spacings2Rated permanent current Iu63 AType of electric connectionPinInsulatedYesRated surge voltage0 kVConditioned rated short-circuit current Iq25 kA Max. rated operation voltage Ue415 VRated short-time withstand current Icw0 kASuitable for devices with N-busbarYesSuitable for devices with auxiliary switchNo

ETIM for 264914 Low-voltage industrial controls and switchgear (EC000215)

Feature Name

Feature Value

Number of phases (EF000351)

3
Number of poles (EF001391)
2
Suitable for number of devices (EF007241)
56
Module width (EF007504)
17.95 mm
Cross section (EF000649)
16 mm²
Length (EF001438)
29.5 mm
Can be cut to size (EF015250)
Yes
Width in number of modular spacings (EF002950)
2
Rated permanent current I_u (EF001389)
63 A
Type of electric connection (EF003961)
Pin
Insulated (EF000019)
Yes
Rated surge voltage (EF002993)
0 kV
Conditioned rated short-circuit current I_q (EF001444)
25 kA
Max. rated operation voltage U_e (EF007357)
415 V
Rated short-time withst...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send EATON - MOELLER / Z-SV-16/2P+2N-2TE with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.