


INDUSTRIAL COMPONENT DATA

FUSE 40A 690V 1*TN/80 AR UC 170M3058 EATON ELECTRIC

Fuse-link, high speed, 40 A, AC 690 V, compact DIN 1, 45..

Brand: EATON - MOELLER | Manufacturer Part Number: FUSE 40A 690V 1*TN/80 AR UC

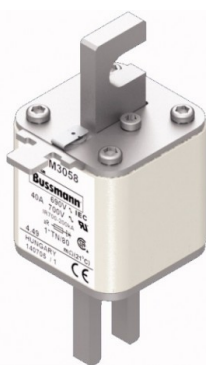

Manufacturer	EATON - MOELLER
MPN / Reference	FUSE 40A 690V 1*TN/80 AR UC
Catalog number	170M3058
Category	Low Voltage HRC fuse
Minimum order	6 Pcs
Document ID	EO-405E1C25CF
Generated	2026-08-06

Product Overview

Fuse-link, high speed, 40 A, AC 690 V, compact DIN 1, 45 x 58 x 104 mm, aR, DIN, IEC, single indicator
fuse cartridge, ultra-fast, 40 A, AC 690 V, compact DIN 1, 45 x 58 x 104 mm, aR, DIN, IEC, single indicator

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	EATON - MOELLER > Bussmann Series High speed fuses
--------------	--

Additional Product Information

Fuse-link, high speed, 40 A, AC 690 V, 200 kA, compact DIN 1, 45 x 58 x 104 mm, aR, DIN, IEC, type T indicator
Fuse-link, high speed, 40 A, AC 690 V, compact DIN 1, 45 x 58 x 104 mm, aR, DIN, IEC, single indicator, square body with centre-bolted tags (slotted), indicator style T for microswitch, semiconductor protection, DIN 43653, IEC 60269-4, Breaking Capacity 200 kA
Delivery program
Product range FuseBasic function Fuse-linkField of application high speedRated current [I]_N 40 ARated voltage AC 690 VConstruction size compact DIN 1Size 45 x 58 x 104 mmUtilization category aRStatus indicator type T indicatorBreaking Capacity 200 kAUsable for size/application semiconductor protectionStandard/Approval DIN IECShapes square body with centre-bolted tags (slotted)Standards/Regulations DIN 43653 IEC 60269-4Technical data ETIM 7.0
Circuit breakers and fuses (EG000020) / Low Voltage HRC fuse (EC000055)Electric engineering, automation, process control engineering / Electrical installation, device / Safety fuse inserts / Low-Voltage HRC fuse () [AFZ800015])Construction sizeOtherRated current 40 ARated voltage 690 VVoltage type ACRated switching capacity 200 kAUtilization category aR (accompanied semiconductor protection)Type of fuse status indicatorTop fuse status indicatorInsulated metal gripping lugs (IMGL)No

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send EATON - MOELLER / FUSE 40A 690V 1*TN/80 AR UC with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.