


INDUSTRIAL COMPONENT DATA

HF8A-2000/5A 741K0013 Y7-135503 EATON ELECTRIC

HF8A-2000/5A

Brand: EATON - MOELLER | Manufacturer Part Number: HF8A-2000/5A

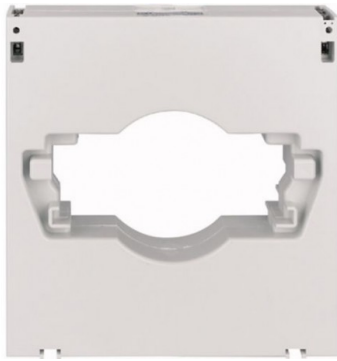

Manufacturer	EATON - MOELLER
MPN / Reference	HF8A-2000/5A
Catalog number	Y7-135503
Category	Current transformer
Minimum order	1 Pcs
Document ID	EO-AC79F24BE0
Generated	2026-08-01

Product Overview

HF8A-2000/5A

Current transformer HF8A, 2000A/5A

Current transformer HF8A, Class 0.5, single phase, 2000A/5A

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog pathEATON - MOELLER > Modular Switchgear - Others and Accessories

Additional Product Information

Current transformer HF8A, 2000A/5ACurrent transformer HF8A, Class 0.5, single phase, 2000A/5A

General specificationsProduct nameEaton Distribution partsPart no.HF8A-2000/5AEAN5703498702436Product

Length/Depth183 millimetreProduct height54 millimetreProduct width185 millimetreProduct weight1.86

kilogramCompliancesRoHS conformProduct TradenameNoneProduct TypeDistribution partsProduct Sub TypeNonePublic

ConsumptionYesProduct Family DescriptionES-PMCC-PDC-Eaton Distribution partsGlobally MarketableYesProduct

Specification DetailsAccuracy class (ratio)3ModelThrough-feed current converterNominal current2000 ANumber of inputs

(primary)1Opening diameter81 mmOpening height - max56 mmOpening height - min56 mmOpening width - max130

mmOpening width - min130 mmOver current limiting factorFS 10Secondary connectionScrew connectionSecondary current

input5 ASecondary rated apparent power15 V·ATEchnical data ETIM 9.0

Low-voltage industrial components (EG000017) / Current transformer (EC002048)Electric engineering, automation, process control engineering / Signal processing / Transformer / Current transformer (ecl@ss13-27-21-09-02

[AAB626019])ModelThrough-feed current converterRated primary current2000 ARated secondary current5 ARated

secondary apparent power15 VAPower consumptionWAccuracy class3Overcurrent limiting factorFS 10CalibratedNoWith

shock protectionNoHeight opening56 - 56 mmWidth opening130 - 130 mmOpening diameter81 mmSnap mountingYesWith
copper railNoSecondary connectionScrew conn...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send EATON - MOELLER / HF8A-2000/5A with the required quantity to info@electricaonline.com or use
electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd
Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification
requirements against the manufacturer documentation before purchase or installation.