


INDUSTRIAL COMPONENT DATA

K4X185/4 074850 Y7-74850 EATON ELECTRIC Connection terminal, 1000A, 4p, flat/round

Brand: EATON - MOELLER | Manufacturer Part Number: K4X185/4

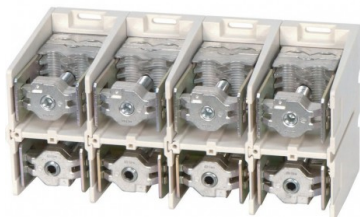

Manufacturer	EATON - MOELLER
MPN / Reference	K4X185/4
Catalog number	Y7-74850
Category	Rail terminal bar
Minimum order	1 Pcs
Document ID	EO-0B87CEEC71
Generated	2026-08-03

Product Overview

Connection terminal, 1000A, 4p, flat/round

Terminal connection, 1000A, 4p, flat/round

Eaton xEffect K-Type Terminal Enclosures Switch- & Controlgear Enclosure. Connection terminal, 1000A, 4p, flat/round, 185

K connecting terminals, for AL and CU, one side round and the other side flat, rated operational current $I_e=1000$ A, poles=4, terminal capacities: Copper round cable stranded, sectoral stranded, round cable solid, sectoral solid and aluminium round conductor solid, sectoral solid=2x150-300 or 4x50-185 or aluminium sectoral solid=2x240 or 4x120-150 mm². Other side: copper band 2x(11x21x1) to 10x40x1 or 10x50x1 or Cu bar=60x15 mm, notes: Conversion kits for strip terminal in cable connection available separately, terminal covers available separately

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	EATON - MOELLER > Connection Accessories for Enclosures
--------------	---

Additional Product Information

General specifications

Product Name Eaton xEffect K-Type Terminal Enclosures Switch- & Controlgear Enclosure Catalog Number 074850 Model Code K4X185/4 EAN 4015080748502 Product Length/Depth 150 mm Product Height 165 mm Product Width 334 mm

Product Weight 17.506 kg Compliances RoHS conform Delivery programme

Type Accessory/spare part type Terminations

Terminals, 160 - 1000 A Nominal current 1000 A Number of poles Four-pole Technical data - electrical

Rated insulation voltage (Ui) 1000 VAC Rated operation current (Ie) 1000 A Technical data - mechanical

Mounting method Screw Number of connections (10 mm squared) 0 Number of connections (16 mm squared) 0 Number of connections (25 mm squared) 0 Number of connections (250 kcmil) 0 Number of connections (Less Than 6 mm squared) 0 Number of connections (Less Than AWG 6) 0 Number of connections (Greater Than 25 mm squared) 8 Number of connections (Greater Than 250 kcmil) 0 Number of connections (AWG 2) 0 Number of connections (AWG 4) 0 Number of connections (AWG 4/0) 0 Number of connections (AWG 6) 0 Number of connections (total) 8 Number of inputs 2 Number of outputs 4 Terminal capacity (aluminum cable) 120 mm² - 150 mm² (4x) 240 mm² (2x) Terminal capacity (conductor) 60 mm x 15 mm Terminal capacity (copper band) 40 mm x 1 mm (10x) for flat strip 2 segments of 21 mm x 1 mm (11x) for flat strip 50 mm x 1 mm (10x) for flat strip Terminal capacity (copper/aluminum cable) 50 mm² - 185 mm² (4x) 150 mm² - 300 mm² (2x) Conductor cross sect...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send EATON - MOELLER / K4X185/4 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.