


INDUSTRIAL COMPONENT DATA

ZB150-175/KK 107317 Y7-107317 EATON ELECTRIC Overload relay, 145-175A, 1N/O+1N/C

Brand: EATON - MOELLER | Manufacturer Part Number: ZB150-175/KK

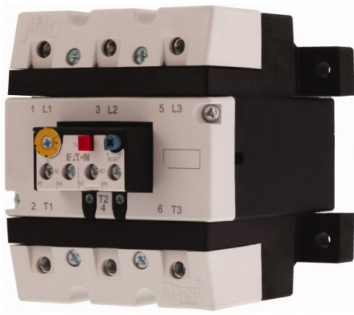

Manufacturer	EATON - MOELLER
MPN / Reference	ZB150-175/KK
Catalog number	Y7-107317
Category	Thermal overload relay
Minimum order	1 Pcs
Document ID	EO-289EB11AD3
Generated	2026-08-06

Product Overview

Overload relay, 145-175A, 1N/O+1N/C

ZB150-175/KK

Overload relay, ZB150, Ir= 145 - 175 A, 1 N/O, 1 N/C, Separate mounting, IP00

Overload relay, Product range: Overload relay ZB up to 150 A, Accessories: Overload relays, Frame size: ZB150, Phase-failure sensitivity: IEC/EN 60947, VDE 0660 Part 102, Description: Test/off button, Reset pushbutton manual/auto, Trip-free release, Mounting type: Separate mounting, Auxiliary contacts N/O = Normally open: 1 N/O, Auxiliary contacts N/C = Normally closed: 1 N/C, For use with: DILM80, DILM95, DILM115, DILM150, DILM170, DILMF80, DILMF95, DILMF115, DILMF150, DIULM80, DIULM95, DIULM115, DIULM150, SDAINLM140, SDAINLM165, SDAINLM200, SDAINLM260, Standards: IEC/EN 60947, VDE 0660, UL, CSA, Degree of Protection: IP00

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	EATON - MOELLER > Thermal Relays
--------------	----------------------------------

Additional Product Information

Overload relay, ZB150, Ir= 145 - 175 A, 1 N/O, 1 N/C, Separate mounting, IP00Overload relay, Product range: Overload relay ZB up to 150 A, Accessories: Overload relays, Frame size: ZB150, Phase-failure sensitivity: IEC/EN 60947, VDE 0660 Part 102, Description: Test/off button, Reset pushbutton manual/auto, Trip-free release, Mounting type: Separate mounting, Auxiliary contacts N/O = Normally open: 1 N/O, Auxiliary contacts N/C = Normally closed: 1 N/C, For use with: DILM80, DILM95, DILM115, DILM150, DILM170, DILMF80, DILMF95, DILMF115, DILMF150, DIULM80, DIULM95, DIULM115, DIULM150, SDAINLM140, SDAINLM165, SDAINLM200, SDAINLM260, Standards: IEC/EN 60947, VDE 0660, UL, CSA, Degree of Protection: IP00Delivery program

Product rangeOverload relay ZB up to 150 AProduct rangeAccessoriesAccessoriesOverload relaysFrame sizeZB150Phase-failure sensitivityIEC/EN 60947, VDE 0660 Part 102DescriptionTest/off button Reset pushbutton manual/auto

Trip-free releaseMounting typeSeparate mounting[Ir]145 - 175 AContact sequenceAuxiliary contactsN/O = Normally open1 N/ON/C = Normally closed1 N/CFor use withDILM80

DILM95

DILM115

DILM150

DILM170

DILMF80

DILMF95

DILMF115

DILMF150

DIULM80

DIULM95

DIULM115

DIULM150

SDAINLM140

SDAINLM165

SDAINLM200

SDAINLM260Short-circuit protectionType "1" coordination[gG/gL]400 AType "2" coordination[gG/gL]315 ANotesOverload release: tripping class 10 A

Short-circuit protection: Observe the maximum permissible fuse of the contactor with direct device mounting.

NotesS...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send EATON - MOELLER / ZB150-175/KK with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.