


INDUSTRIAL COMPONENT DATA

Z-SV-16/3P+3N-3TE 264915 Y7-264915 EATON ELECTRIC

Phase busbar, 4-phases, 16qmm, pin, 1m

Brand: EATON - MOELLER | Manufacturer Part Number: Z-SV-16/3P+3N-3TE

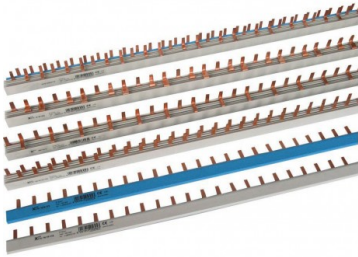

Manufacturer	EATON - MOELLER
MPN / Reference	Z-SV-16/3P+3N-3TE
Catalog number	Y7-264915
Category	Phase busbar
Minimum order	1 Pcs
Document ID	EO-82D18118C6
Generated	2026-08-06

Product Overview

Phase busbar, 4-phases, 16qmm, pin, 1m

Z-SV-16/3P+3N-3TE

Eaton Distribution parts. Phase busbar, 4-phases, 16qmm, pin, 1m

Block busbar for PLN. (1 space units), Z-SI, supplied without end caps

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path EATON - MOELLER > Modular Switchgear - Others and Accessories

Additional Product Information

General specifications

Product Name Eaton Distribution parts Catalog Number 264915 Model Code Z-SV-16/3P+3N-3TE EAN 4015082649159

Product Length/Depth 29.5 mm Product Height 24 mm Product Width 1020 mm Product Weight 0.87 kg Compliances RoHS conform Product specifications

Features Insulated

Can be cut to size Electric connection type Pin Rated surge voltage 4 KV Rated uninterrupted current (Iu) 63 A Suitable for number of devices 6 Number of poles Three-pole Color Other Rated short-time withstand current (Icw) 0 kA Cross section 16 mm² Number of modular spacings 56 Number of phases 3 Pitch dimensions 17.8 mm Rated operational voltage (Ue) - max 415 V Rated conditional short-circuit current (Iq) 0 kA

ETIM for 264915 Low-voltage industrial controls and switchgear (EC000215)

Feature Name

Feature Value

Number of phases (EF000351)

3

Number of poles (EF001391)

3

Suitable for number of devices (EF007241)

6

Module width (EF007504)

17.8 mm

Cross section (EF000649)

16 mm²

Length (EF001438)

29.5 mm

Can be cut to size (EF015250)

Yes

Width in number of modular spacings (EF002950)

56

Rated permanent current I_u (EF001389)

63 A

Type of electric connection (EF003961)

Pin

Insulated (EF000019)

Yes

Rated surge voltage (EF002993)

4 kV

Conditioned rated short-circuit current I_q (EF001444)

0 kA

Max. rated operation voltage U_e (EF007357)

415 V

Rated short-time withstand current I_{cw} (EF007050)

0 kA

Suitable for devices with N-conductor (EF007218)

No

Suitable for devices with auxiliary switch (EF0072...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send EATON - MOELLER / Z-SV-16/3P+3N-3TE with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.