


**INDUSTRIAL COMPONENT DATA**

# T3-2-8400/I2 207181 Y7-207181 EATON ELECTRIC Reversing switches, Contacts: 4, 32 A, front plate: 1-0-2, 45 °..

Brand: EATON - MOELLER | Manufacturer Part Number: T3-2-8400/I2

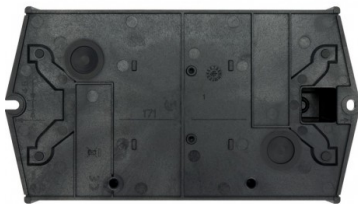

|                 |                 |
|-----------------|-----------------|
| Manufacturer    | EATON - MOELLER |
| MPN / Reference | T3-2-8400/I2    |
| Catalog number  | Y7-207181       |
| Category        | Off-load switch |
| Minimum order   | 1 Pcs           |
| Document ID     | EO-BF34231E9D   |
| Generated       | 2026-08-05      |

## Product Overview

Reversing switches, Contacts: 4, 32 A, front plate: 1-0-2, 45 °, maintained, surface mounting

T3-2-8400/I2

Eaton Moeller® series T3 Reversing switches, T3, 32 A, surface mounting, 2 contact unit(s), Contacts: 4, 45 °, maintained, With 0 (Off) position, 1-0-2, Design number 8400

Reversing switch, Product range: Control switches, Part group reference: T3, with black thumb grip and front plate, Contacts: 4, Degree of Protection: IP65, Design: surface mounting, Switching angle: 45 °, Switching performance: maintained, With 0 (Off) position, front plate: 1-0-2, Motor rating AC-23A, 50 - 60 Hz 400 V: P = 15 kW, Rated uninterrupted current: Iu = 32 A, 2 contact unit(s), Standards: IEC/EN 60947, VDE 0660, IEC/EN 60204, CSA, UL, Switch-disconnector according to IEC/EN 60947-3

**STRUCTURED PRODUCT DATA**

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

Catalog path **EATON - MOELLER > Disconnectors and Cam Switches**

## Additional Product Information

General specifications

Product Name Eaton Moeller® series T3 Reversing switch Catalog Number 207181 Model Code T3-2-8400/I2 EAN 4015082071813 Product Length/Depth 181 mm Product Height 107 mm Product Width 100 mm Product Weight 0.364 kg

Certifications CSA

CSA-C22.2 No. 94

UL

VDE 0660

UL 60947-4-1

UL File No.: E36332

CSA Class No.: 3211-05

CSA File No.: 012528

CSA-C22.2 No. 60947-4-1-14

IEC/EN 60204

IEC/EN 60947-3

UL Category Control No.: NLRV

CE

IEC/EN 60947 Catalog Notes Rated Short-time Withstand Current (I<sub>cs</sub>) for a time of 1 second

ETIM for 207181 Low-voltage industrial controls and switchgear (EC001105)

Feature Name

Feature Value

Model (EF000010)

Reversing switch

Number of poles (EF001391)

2

With zero (off) position (EF001416)

Yes

With retraction in 0-position (EF002428)

No

Rated permanent current I<sub>u</sub> (EF001389)

32 A

Rated operation current I<sub>e</sub> at AC-3, 400 V (EF001392)

23.7 A

Rated operation power at AC-3, 400 V (EF001364)

12 kW

Degree of protection (IP), front side (EF003118)

IP65

Degree of protection (NEMA), front side (EF011961)

12

Number of auxiliary contacts as normally closed contact (EF001377)

0

Number of auxiliary contacts as normally open contact (EF001376)

0

Number of auxiliary contacts as change-over contact (EF003531)

0

Suitable for floor mounting (EF007243)

Yes

Suitable for front mounting (EF007246)

No

Suitable for distribution board installation (EF007262)

No

Suitable for intermediate mounting (EF007264)

No

Complete device in housing (EF007317)

Yes

Housing m...

**REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW**

Send EATON - MOELLER / T3-2-8400/I2 with the required quantity to [info@electricaonline.com](mailto:info@electricaonline.com) or use [electricaonline.com/request-quote](https://electricaonline.com/request-quote).

**GLOBAL OFFICES**

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.