


INDUSTRIAL COMPONENT DATA

SWD4-1M5LR4P-2R 183221 Y7-183221 EATON ELECTRIC MB-Power-cable IP67 for connecting the Multiblock, 1.5 m , p..

Brand: EATON - MOELLER | Manufacturer Part Number: SWD4-1M5LR4P-2R

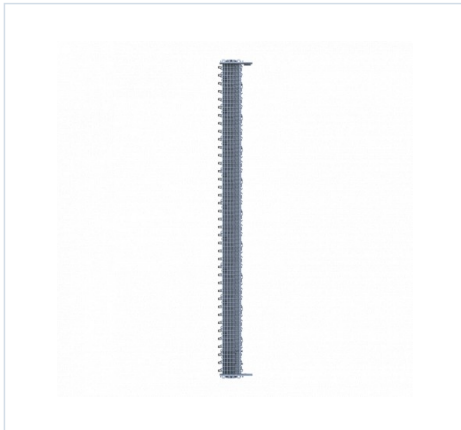

Manufacturer	EATON - MOELLER
MPN / Reference	SWD4-1M5LR4P-2R
Catalog number	Y7-183221
Category	Data and communication cable
Minimum order	1 Pcs
Document ID	EO-D061DBB224
Generated	2026-08-06

Product Overview

MB-Power-cable IP67 for connecting the Multiblock, 1.5 m , prefabricated with 7/8" plug and 7/8" socket
SWD4-1M5LR4P-2R

Eaton SWD4 MB-Power-cable, IP67, 1.5 m, 4 pole, Prefabricated with 7/8" right-angle plug and 7/8" right-angle socket
4 pole MB-Power-cable IP67 degree of protection for connecting the Multiblock I/O module, Cable 1.5 m length,
Prefabricated with 7/8z right-angle plug and 7/8z right-angle socket

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	EATON - MOELLER > Smartwire Darwin
--------------	------------------------------------

Additional Product Information

General specifications

Product Name Eaton SWD4 Accessory MB-Power-cable Catalog Number 183221 Model Code SWD4-1M5LR4P-2R EAN 4015081781546 Product Length/Depth 307.692 mm Product Height 51.282 mm Product Width 307.692 mm Product Weight 0.409 kg Certifications UL

CSA Catalog Notes Condensation: permissible Features & Functions

Features Oil resistant (acc. EN 60811-404)

Oil resistant (acc. IEC 60811-404)

Radial water blocking cable Fitted with: 7/8" right-angle plug

7/8" right-angle socket Functions For directly connecting the power supply to EU6E.., EU8E.. IP67 SmartWire-DT modules

General

Cable length 1.5 m Number of Poles Four-pole Outer diameter - approximate 11 mm Outer sheath material Polyvinyl

chloride (PVC) Permitted bending radius, moving application with forced guidance - min 0 mm Product category
SmartWire-DT accessories Suitable as Signaling cable Climatic environmental conditions
Ambient operating temperature - min -25 °C Ambient operating temperature - max 70 °C Safety
Flame retardant In accordance with EN 60332-1-2 Design verification
Equipment heat dissipation, current-dependent P_{vid} 0 W Heat dissipation capacity P_{diss} 0 W Heat dissipation per pole,
current-dependent P_{vid} 0 W Rated operational current for specified heat dissipation (I_n) 0 A Static heat dissipation,
non-current-dependent P_{vs} 0 W 10.2.2 Corrosion resistance Meets the product standard's requirements. 10.2.3.1
Verification of thermal stability of enclosures Meets the product standard's requirements...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send EATON - MOELLER / SWD4-1M5LR4P-2R with the required quantity to info@electricaonline.com or use
electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd
Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification
requirements against the manufacturer documentation before purchase or installation.