


INDUSTRIAL COMPONENT DATA

T0-1-15441/XZ 009287 Y7-9287 EATON ELECTRIC

Changeoverswitches, Contacts: 2, 20 A, 90 °, rear mounting, Basi..

Brand: EATON - MOELLER | Manufacturer Part Number: T0-1-15441/XZ

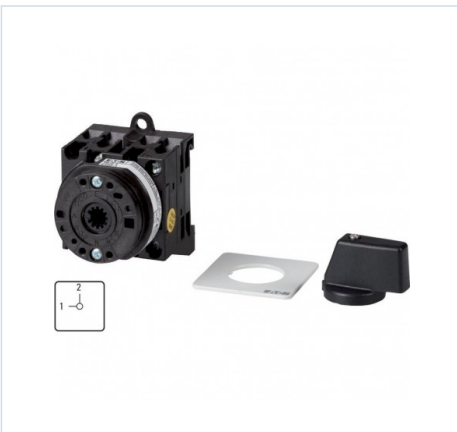

Manufacturer	EATON - MOELLER
MPN / Reference	T0-1-15441/XZ
Catalog number	Y7-9287
Category	Control switch
Minimum order	1 Pcs
Document ID	EO-602390FB2A
Generated	2026-08-05

Product Overview

Changeoverswitches, Contacts: 2, 20 A, 90 °, rear mounting, Basic switch

Switch 2-pole switch 20 A Indicator plate: 1-2 90°

Changeoverswitches, T0, 20 A, rear mounting, Basic switch, 1 contact unit(s), Contacts: 2, 90 °, design no. 15441

Changeover switch, Product range: Control switches, Standards: IEC/EN 60947, VDE 0660, IEC/EN 60204,

Switch-disconnector according to IEC/EN 60947-3, Part group reference: T0, Contacts: 2, Design: rear mounting, Basic switch, Switching angle: 90 °, 1 contact unit(s), Rated uninterrupted current: Iu= 20 A

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path EATON - MOELLER > Disconnectors and Cam Switches

Additional Product Information

Changeoverswitches, T0, 20 A, rear mounting, Basic switch, 1 contact unit(s), Contacts: 2, 90 °, design no.

15441Changeover switch, Product range: Control switches, Standards: IEC/EN 60947, VDE 0660, IEC/EN 60204,

Switch-disconnector according to IEC/EN 60947-3, Part group reference: T0, Contacts: 2, Design: rear mounting, Basic switch, Switching angle: 90 °, 1 contact unit(s), Rated uninterrupted current: Iu= 20 A

Delivery program Product rangeControl switchesPart group referenceT0Basic functionChangeoverswitchesContacts2Designrear mounting

Basic switchContact sequenceSwitching angle90 °Design number15441Front plate no.Motor rating AC-23A, 50 - 60 Hz

[P]400 V [P]5.5 kWRated uninterrupted current [Iu]20 ANote on rated uninterrupted current IuRated uninterrupted current Iuis specified for max. cross-section.Number of contact units1 contact unit(s)Technical data

General Standards IEC/EN 60947, VDE 0660, IEC/EN 60204

Switch-disconnector according to IEC/EN 60947-3 Climatic proofing Damp heat, constant, to IEC 60068-2-78

Damp heat, cyclic, to IEC 60068-2-30 Ambient temperature Open-25 - +50 °C Ambient temperature Enclosed-25 - +40

°C Overvoltage category/pollution degree III/3 Rated impulse withstand voltage [U_{imp}] 6000 V AC Mechanical shock

resistance 15 g Mounting position As required Contacts Electrical characteristics Rated operational voltage [U_e] 690 V

AC Electrical characteristics Rated uninterrupted current [I_u] 20 A Electrical characteristics Note on rated uninterrupted current

I_u Rated uninterru...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send EATON - MOELLER / T0-1-15441/XZ with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.