


INDUSTRIAL COMPONENT DATA

T3-2-10/XZ 017674 Y7-17674 EATON ELECTRIC On-Off switch, 3 pole + N, 32 A, 90 °, rear mounting, Basic switch

Brand: EATON - MOELLER | Manufacturer Part Number: T3-2-10/XZ

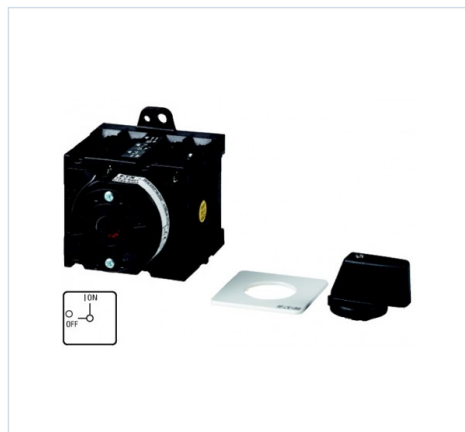

Manufacturer	EATON - MOELLER
MPN / Reference	T3-2-10/XZ
Catalog number	Y7-17674
Category	Switch disconnecter
Minimum order	1 Pcs
Document ID	EO-03F1EECC54
Generated	2026-08-02

Product Overview

On-Off switch, 3 pole + N, 32 A, 90 °, rear mounting, Basic switch

Disconnect switch ON-OFF; 3-pole + N; 32; 90 °; Mounting bottom panel; Switch replacement part for case

On-Off switch, T3, 32 A, rear mounting, Basic switch, 2 contact unit(s), 3 pole + N

On-Off switch, Product range: On-Off switch, Part group reference: T3, 3 pole + N, Design: rear mounting, Basic switch, Switching angle: 90 °, Motor rating AC-23A, 50 - 60 Hz 400 V: P = 15 kW, Rated uninterrupted current: I_u = 32 A, 2 contact unit(s), Standards: IEC/EN 60947, VDE 0660, IEC/EN 60204, Switch-disconnector according to IEC/EN 60947-3

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	EATON - MOELLER > Disconnectors and Cam Switches
--------------	--

Additional Product Information

On-Off switch, T3, 32 A, rear mounting, Basic switch, 2 contact unit(s), 3 pole + N
On-Off switch, Product range: On-Off switch, Part group reference: T3, 3 pole + N, Design: rear mounting, Basic switch, Switching angle: 90 °, Motor rating AC-23A, 50 - 60 Hz 400 V: P = 15 kW, Rated uninterrupted current: I_u = 32 A, 2 contact unit(s), Standards: IEC/EN 60947, VDE 0660, IEC/EN 60204, Switch-disconnector according to IEC/EN 60947-3
Delivery program

Product rangeOn-Off switchPart group referenceT3Number of poles3 pole + NDesignrear mounting

Basic switchContact sequenceSwitching angle90 °Design number10Front plate no.Motor rating AC-23A, 50 - 60 Hz [P]400 V [P]15 kWRated uninterrupted current [I_u]32 ANote on rated uninterrupted current !uRated uninterrupted current I_{uis} specified for max. cross-section.Number of contact units2 contact unit(s)Technical data

GeneralStandardsIEC/EN 60947, VDE 0660, IEC/EN 60204

Switch-disconnector according to IEC/EN 60947-3Climatic proofingDamp heat, constant, to IEC 60068-2-78

Damp heat, cyclic, to IEC 60068-2-30 Ambient temperature Open-25 - +50 °C Ambient temperature Enclosed-25 - +40 °C
Overvoltage category/pollution degree III/3 Rated impulse withstand voltage [Uimp] 6000 V AC Mechanical shock resistance 15 g Mounting position As required Contacts Mechanical variables Number of poles 3 pole + N Electrical characteristics Rated operational voltage [Ue] 690 V AC Electrical characteristics Rated uninterrupted current [Iu] 32 A Electrical characteristics Note on rated unin...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send EATON - MOELLER / T3-2-10/XZ with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.