


**INDUSTRIAL COMPONENT DATA**

# T3-3-21/EZ 018959 Y7-18959 EATON ELECTRIC Reversing switches, Contacts: 6, 32 A, front plate: 1-2, 45 °, mai..

Brand: EATON - MOELLER | Manufacturer Part Number: T3-3-21/EZ

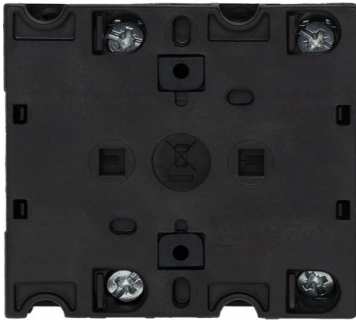

|                 |                 |
|-----------------|-----------------|
| Manufacturer    | EATON - MOELLER |
| MPN / Reference | T3-3-21/EZ      |
| Catalog number  | Y7-18959        |
| Category        | Off-load switch |
| Minimum order   | 1 Pcs           |
| Document ID     | EO-5FA3A67CD2   |
| Generated       | 2026-08-06      |

## Product Overview

Reversing switches, Contacts: 6, 32 A, front plate: 1-2, 45 °, maintained, centre mounting  
 Reversing switch; 6-pole; 32; rating Plate: 1-2; 45 °; Interlock; recessed Mounting with central fixing  
 Eaton Moeller® series T3 Reversing switches, T3, 32 A, center mounting, 3 contact unit(s), Contacts: 6, 45 °, maintained, Without 0 (Off) position, 1-2, Design number 21  
 Reversing switch, Product range: Control switches, Part group reference: T3, with black thumb grip and front plate, Contacts: 6, Degree of Protection: Front IP65, Design: center mounting, Switching angle: 45 °, Switching performance: maintained, Without 0 (Off) position, front plate: 1-2, Motor rating AC-23A, 50 - 60 Hz 400 V: P = 15 kW, Rated uninterrupted current: Iu = 32 A, 3 contact unit(s), Standards: IEC/EN 60947, VDE 0660, IEC/EN 60204, CSA, UL, Switch-disconnector according to IEC/EN 60947-3

**STRUCTURED PRODUCT DATA**

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

Catalog path **EATON - MOELLER > Disconnectors and Cam Switches**

## Additional Product Information

**General specifications**

Product Name Eaton Moeller® series T3 Reversing switch Catalog Number 018959 Model Code T3-3-21/EZ EAN 4015080189596 Product Length/Depth 124 mm Product Height 54 mm Product Width 61 mm Product Weight 0.233 kg  
 Certifications IEC/EN 60204  
 UL  
 CSA-C22.2 No. 94  
 CE

CSA

CSA-C22.2 No. 60947-4-1-14

IEC/EN 60947

UL Category Control No.: NLRV

UL File No.: E36332

VDE 0660

CSA File No.: 012528

UL 60947-4-1

CSA Class No.: 3211-05

IEC/EN 60947-3 Catalog Notes Rated Short-time Withstand Current (I<sub>cw</sub>) for a time of 1 second

ETIM for 018959 Low-voltage industrial controls and switchgear (EC001105)

Feature Name

Feature Value

Model (EF000010)

Reversing switch

Number of poles (EF001391)

3

With zero (off) position (EF001416)

No

With retraction in 0-position (EF002428)

No

Rated permanent current I<sub>u</sub> (EF001389)

32 A

Rated operation current I<sub>e</sub> at AC-3, 400 V (EF001392)

23.7 A

Rated operation power at AC-3, 400 V (EF001364)

12 kW

Degree of protection (IP), front side (EF003118)

IP65

Degree of protection (NEMA), front side (EF011961)

12

Number of auxiliary contacts as normally closed contact (EF001377)

0

Number of auxiliary contacts as normally open contact (EF001376)

0

Number of auxiliary contacts as change-over contact (EF003531)

0

Suitable for floor mounting (EF007243)

No

Suitable for front mounting (EF007246)

Yes

Suitable for distribution board installation (EF007262)

No

Suitable for intermediate mounting (EF007264)

No

Complete device in housing (EF007317)

No

Housing materia...

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send EATON - MOELLER / T3-3-21/EZ with the required quantity to [info@electricaonline.com](mailto:info@electricaonline.com) or use [electricaonline.com/request-quote](https://electricaonline.com/request-quote).

### GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.