


INDUSTRIAL COMPONENT DATA

T5B-3-143/E 044904 Y7-44904 EATON ELECTRIC Step switches, Contacts: 4, 63 A, front plate: 0-4, 45 °, maintai..

Brand: EATON - MOELLER | Manufacturer Part Number: T5B-3-143/E

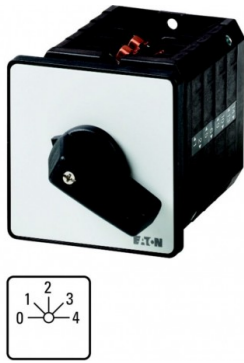

Manufacturer	EATON - MOELLER
MPN / Reference	T5B-3-143/E
Catalog number	Y7-44904
Category	Switch disconnecter
Minimum order	1 Pcs
Document ID	EO-8C2FEB7ECB
Generated	2026-08-05

Product Overview

Step switches, Contacts: 4, 63 A, front plate: 0-4, 45 °, maintained, flush mounting

Switch steps; 4-pole; 63; rating Plate: 0-4; 45 °; Interlock; recessed Mounting

Eaton Moeller® series T5B Step switches, T5B, 63 A, flush mounting, 3 contact unit(s), Contacts: 4, 45 °, maintained, With 0 (Off) position, 0-4, Design number 143

Step switch, Product range: Control switches, Part group reference: T5B, with black thumb grip and front plate, Contacts: 4, Degree of Protection: Front IP65, Design: flush mounting, Switching angle: 45 °, Switching performance: maintained, With 0 (Off) position, front plate: 0-4, Motor rating AC-23A, 50 - 60 Hz 400 V: P = 30 kW, Rated uninterrupted current: Iu = 63 A, 3 contact unit(s), Standards: IEC/EN 60947, VDE 0660, IEC/EN 60204, CSA, UL, Switch-disconnector according to IEC/EN 60947-3

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path **EATON - MOELLER > Disconnectors and Cam Switches**

Additional Product Information

General specifications

Product Name Eaton Moeller® series T5B Step switch Catalog Number 044904 Model Code T5B-3-143/E EAN 4015080449041 Product Length/Depth 124 mm Product Height 88 mm Product Width 88 mm Product Weight 0.59 kg

Certifications UL File No.: E36332

VDE 0660

UL 60947-4-1

CE

UL Category Control No.: NLRV
CSA-C22.2 No. 60947-4-1-14
CSA-C22.2 No. 94
CSA Class No.: 3211-07
IEC/EN 60947-3
CSA
IEC/EN 60947
CSA File No.: 012528
IEC/EN 60204
UL Catalog Notes Rated Short-time Withstand Current (Icw) for a time of 1 second
ETIM for 044904 Low-voltage industrial controls and switchgear (EC000216)
Feature Name
Feature Value
Version as main switch (EF006981)
No
Version as maintenance-/service switch (EF006986)
No
Version as safety switch (EF006985)
No
Version as emergency stop installation (EF006959)
No
Version as reversing switch (EF009408)
No
Number of switches (EF005586)
1
Max. rated operation voltage Ue AC (EF007355)
690 V
Rated operating voltage (EF001435)
690 V
Rated permanent current Iu (EF001389)
63 A
Rated permanent current at AC-21, 400 V (EF009165)
63 A
Rated operation power at AC-3, 400 V (EF001364)
22 kW
Rated short-time withstand current Icw (EF007050)
1.3 kA
Rated operation power at AC-23, 400 V (EF007027)
30 kW
Switching power at 400 V (EF009166)
30 kW
Conditioned rated short-circuit current Iq (EF001444)
2 kA
Number of poles (EF001391)
1
Number of auxiliary contacts as normally closed contact (EF001377)
0

Number of auxiliary contacts as normally open contac...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send EATON - MOELLER / T5B-3-143/E with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.