


INDUSTRIAL COMPONENT DATA

TS35X7,5 053030 Y7-53030 EATON ELECTRIC Top-hat rail 35x7.5mm

Brand: EATON - MOELLER | Manufacturer Part Number: TS35X7,5

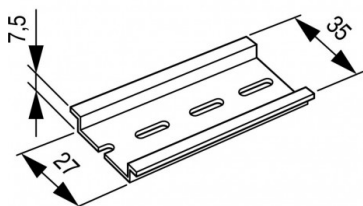

Manufacturer	EATON - MOELLER
MPN / Reference	TS35X7,5
Catalog number	Y7-53030
Category	Mounting rail
Minimum order	1 Pcs
Document ID	EO-5ABB93661D
Generated	2026-08-05

Product Overview

Top-hat rail 35x7.5mm

Rail 35x7.5mm

Top-hat rail 35x7.5mm, slotted, acc. to IEC/EN 60715, short-circuit rating as PE conductor corresponds to copper conductor 16 mm according to IEC/EN 60439-1, supplied in lengths=1m

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path

EATON - MOELLER > Connection Accessories for Enclosures

Additional Product Information

Top-hat rail 35x7.5mmTop-hat rail 35x7.5mm, slotted, acc. to IEC/EN 60715, short-circuit rating as PE conductor corresponds to copper conductor 16 mm according to IEC/EN 60439-1, supplied in lengths=1m

General specificationsProduct nameEaton xEffect Accessories mounting partPart no.TS35X7,5EAN4015080530305Product Length/Depth2000 millimetreProduct height8 millimetreProduct width35 millimetreProduct weight0.634 kilogramCompliancesRoHS conformCertificationsaccording to IEC/EN 60715Product TradenamexEffect AccessoriesProduct TypeMounting partProduct Sub TypeNoneDelivery programTypeGeneral switchboard accessoryModelDIN rail (top hat rail) 35/7.5 mmAccessory/spare part typeDIN-railTechnical Data - MechanicalSurface finishingGalvanic/electrolytic zinc platedMaterialSteelMaterial thickness1 mmDrill hole distance (centrically)36 mmPunch shapeLong-slotAdditional informationSpecial features35 x 7.5 mm. Short-circuit strength as PE conductor corresponds to 16 mm² copper conductor as defined in IEC/EN 61439-1. Isolation in hole permitted. Supplied in lengths of 2 m.Technical data ETIM 9.0

Energy distribution systems (EG000015) / Mounting rail (EC001285)Electric engineering, automation, process control

engineering / Electrical insulation and connecting material / Energy distribution system / DIN rail (ecI@ss13-27-40-06-02 [ACO367016])ModelDIN rail (top hat rail) 35/7.5 mmMaterialSteelSurface protectionGalvanic/electrolytic zinc platedPunch shapeLong-slotDrill hole distance centrically36....

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send EATON - MOELLER / TS35X7,5 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.