


**INDUSTRIAL COMPONENT DATA**

# 1133515 LAPP ÖLFLEX SERVO 2XSLCH-JB 3X2,5+3G0,5

Brand: LAPP | Manufacturer Part Number: 1133515

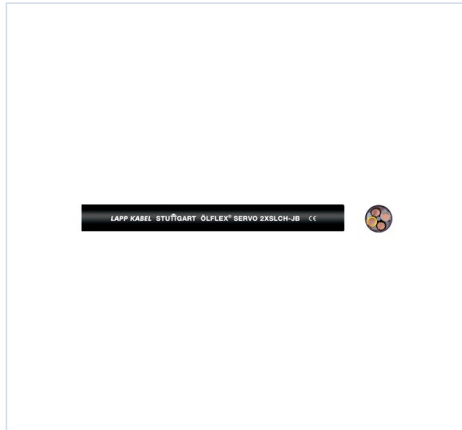

|                 |                                          |
|-----------------|------------------------------------------|
| Manufacturer    | LAPP                                     |
| MPN / Reference | 1133515                                  |
| Catalog number  | 1133515                                  |
| Category        | Power cable 1 kV, for moving application |
| Minimum order   | 1 m.                                     |
| Document ID     | EO-C9EB578B58                            |
| Generated       | 2026-08-03                               |

## Product Overview

ÖLFLEX SERVO 2XSLCH-JB 3X2,5+3G0,5

ÖLFLEX® SERVO 2XSLCH-JB

**STRUCTURED PRODUCT DATA**

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

|              |                             |
|--------------|-----------------------------|
| Catalog path | LAPP > ÖLFLEX-SERVO cabling |
|--------------|-----------------------------|

## Additional Product Information

**Benefits**

EMC-compliant installation of power drive systems conforming to EN 61800-3

High power transmission for large drives

Low capacitance design enables longer cable connection between frequency converter and motor

Symmetrical 3+3 Version supports the reduction of damaging bearing currents

Reduction of flame propagation, density and toxicity of smoke gases in event of fire

**Application range**

Connecting cable between frequency converter and motor

In dry, damp or wet interiors

Paper industry, automotive industry

Food production and packaging machinery

Machine tools

**Product features**

Low-capacitance design

Fire behaviour:

- Flame-retardant (IEC 60332-1-2)
- Halogen-free (IEC 60754-1)
- No corrosive gases (IEC 60754-2)
- Low smoke density (IEC 61034-2)
- Low toxicity (EN 50305)

No flame-propagation according to IEC 60332-3-24 respectively IEC 60332-3-25 (Flame spread on vertical cable or wire bundle)

UV and weather-resistant according to ISO 4892-2

Norm references / Approvals

Based on VDE 0276, 0250, 0207

Product Make-up

Fine-wire, bare copper conductor

Core insulation: XLPE

Cores twisted concentrically (symmetrically splitted protective conductor of 3+3 version is gusset-filling divided between the power cores)

Screening: wrapping of laminated aluminium foil in combination with tinned copper braiding

Outer sheath: Halogen-free special compound, colour black (RAL 9005)

Classification ETIM 5

ETIM 5.0 Class-ID: EC000057

ETIM 5.0 Class-Description: Low voltage power cable

Classifi...

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send LAPP / 1133515 with the required quantity to [info@electricaonline.com](mailto:info@electricaonline.com) or use [electricaonline.com/request-quote](https://electricaonline.com/request-quote).

### GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten PI #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.