


INDUSTRIAL COMPONENT DATA

22262065 AB-C4-15,0TPE-M12FA-HD LAPP

AB-C4-15,0TPE-M12FA-HD

Brand: LAPP | Manufacturer Part Number: 22262065

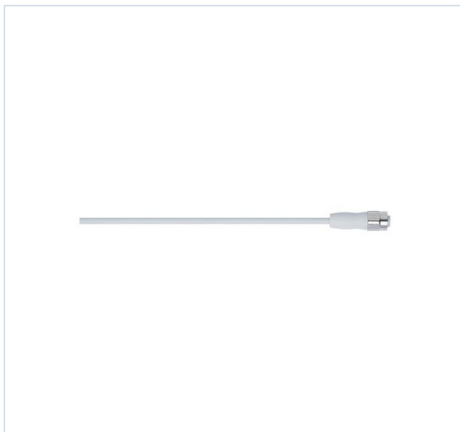

Manufacturer	LAPP
MPN / Reference	22262065
Catalog number	AB-C4-15,0TPE-M12FA-HD
Category	Sensor-actuator patch cord
Minimum order	1 Pcs
Document ID	EO-A6732AC0AE
Generated	2026-08-04

Product Overview

AB-C4-15,0TPE-M12FA-HD
UNITRONIC® SENSOR HD M12

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	LAPP > Fieldbus Modules passive
--------------	---------------------------------

Additional Product Information

4-pos. Sensor/actuator cable in Hygienic Design for food&beverage with M12 thread and stainless steel (V4A), high protection class IP65/IP67/IP68/IP69

IP69 for high-pressure cleaning

- 40 °C to + 105 °C

Benefits

Hygienic Design for ideal cleaning results

Guaranteed density by meeting the highest protection class

Stainless steel knurl to ensure protection against corrosion

Bright colors to detect contamination quickly

Application range

Food production and packaging machinery

Freezing plants, cold storage

washdown area with frequent contact

with cleaning agents

Product features

Suitable for drag chains

4-pin plug/socket M12 on free conductor end

Norm references / Approvals

ECOLAB®

Industry standard in the field of professional cleaning and disinfection in the food and beverage industry

FDA 21 CFR 177.2600

Special sealing element for food and beverage industry in North America

Product Make-up

wire cross-section: 0,34 mm²

Colour-code:

4-pin: bn (1), wh (2), bu (3), bk (4)

Outer sheath: TPE halogen-free,

grey (similar to RAL 7035)

Classification ETIM 5

ETIM 5.0 Class-ID: EC001855

ETIM 5.0 Class-Description: Sensor-actuator patch cord

Classification ETIM 6

ETIM 6.0 Class-ID: EC001855

ETIM 6.0 Class-Description: Sensor-actuator patch cord

Material

Contact: CuSn

Contact surface: Ni/Au

Knurl: Stainless steel (V4A)

Gripping body: PP

Minimum bending radius

Fixed installation: 5 x outer diameter

Flexing: 10 x outer diameter

Protection rating

IP65/IP67/IP68/IP69

Ambient temperature (oper...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send LAPP / 22262065 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.