


INDUSTRIAL COMPONENT DATA

032750 LEGRAND LCS-CABLE C5E U/UTP DCA 305M. Sold in reels of 305 m. The unit price is per meter.

Brand: LEGRAND | Manufacturer Part Number: 032750

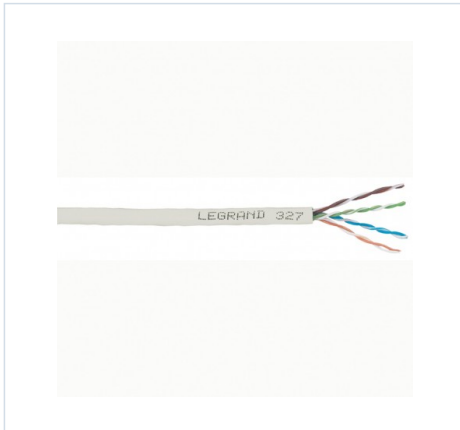

Manufacturer	LEGRAND
MPN / Reference	032750
Catalog number	032750
Category	Data and communication cable
Minimum order	305 m.
Document ID	EO-5A5DC021D2
Generated	2026-07-27

Product Overview

LCS-CABLE C5E U/UTP DCA 305M. Sold in reels of 305 m. The unit price is per meter.

Lan cable - category 5e - U/UTP - 4 pairs - L. 305 m - LSZH sleeve

4 pairs Cat.5e UTP cable LSZH 305m cover. Supplied in box. Weight 10kg

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	LEGRAND > VDI CABLES
--------------	----------------------

Additional Product Information

Pack (number of units)305

Volume (dm3)30.00

Weight (g)8 476.00

Product characteristicsCat. 5e cables for local networks

Performance 100 MHz

Cable with 4 twisted pairs, 100 ?

LSZH sheath: zero halogen

Grey RAL 7035

ANSI/TIA colour code

Compliant with ISO/IEC 11 801, EN 50173, ANSI/TIA 568 standards

Products conforming to the new CPR regulations

Euroclass Dca for LSZH cables, Euroclass Eca for PVC cables

U/UTP - 4 pairs

LSZH

Length 305 m

Supplied in cardboard box

Weight 9 kg

General characteristics Legrand cabling system, LCS³ cat. 5e - cables and cords

ETIM for 032750 Cable (EC003249)

Feature Name

Feature Value

Protective sheath (EF001691)

None

Halogen free according to EN IEC 60754-2 (EF003792)

Yes

Reaction-to-fire according to EN 13501-6: Flaming droplets/particles (EF011579)

d2

Cable height approx. (EF003797)

5 mm

Reaction-to-fire according to EN 13501-6: Smoke production (EF011578)

s2

Reaction-to-fire according to EN 13501-6: Class (EF011577)

Dca

Weight (EF000167)

36

Cable width approx. (EF003796)

5 mm

Duplex (EF023003)

No

Cable type (EF000081)

U/UTP

Conductor surface (EF010804)

Bare

Oil resistant according to EN IEC 60811-404 (EF009770)

No

Number of stranding elements (EF001688)

4

With rip cord (EF017088)

No

Suitable for use as security alarm cable (EF017089)

No

Reaction-to-fire according to EN 13501-6: Acidity (EF011580)

a1

Min. permitted bending radius, moving application/free movement (EF011802)

20 mm

Min. permitted bending radius, moving application with forced guidan...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send LEGRAND / 032750 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.