


INDUSTRIAL COMPONENT DATA

032756 LEGRAND LCS-CABLE C6 F/UTP DCA 500M. Sold in reels of 500 m. The unit price is per meter.

Brand: LEGRAND | Manufacturer Part Number: 032756

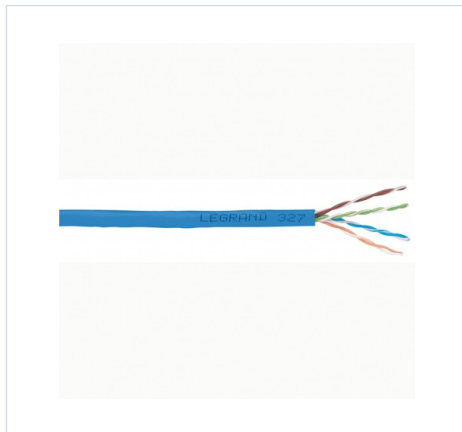

Manufacturer	LEGRAND
MPN / Reference	032756
Catalog number	032756
Category	Data and communication cable
Minimum order	500 m.
Document ID	EO-667781D760
Generated	2026-07-28

Product Overview

LCS-CABLE C6 F/UTP DCA 500M. Sold in reels of 500 m. The unit price is per meter.

Lan cable - category 6 - F/UTP - 4 pairs - L. 500 m - LSZH sleeve

4 pairs Cat.6 FTP cable LSZH cover 500 m. Supplied in coil. Weight 25 kg

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	LEGRAND > VDI CABLES
--------------	----------------------

Additional Product Information

Pack (number of units)500

Volume (dm3)67.20

Weight (g)28 200.00

Product characteristicsCat. 6 cables for local networks

Performance 250 MHz

4 pairs or 2 x 4 twisted pairs, 100 ?

Blue RAL 5015

ANSI/TIA colour code

Compliant with ISO/IEC 11 801, EN 50173 and ANSI/TIA 568 standards

Products conforming to the new CPR regulations

Euroclass Dca for LSZH cables (except Cat No 0 328 86: Euroclass Cca), Euroclass Eca for PVC cables

F/UTP - 4 pairs

LSZH

Length 500 m
Supplied on reel
Weight 27 kg
General characteristics Legrand cabling system, LCS³ cat. 6 - cables and cords
ETIM for 032756 Cable (EC003249)
Feature Name
Feature Value
Protective sheath (EF001691)
None
Halogen free according to EN IEC 60754-2 (EF003792)
Yes
Reaction-to-fire according to EN 13501-6: Flaming droplets/particles (EF011579)
d2
Cable height approx. (EF003797)
7.2 mm
Reaction-to-fire according to EN 13501-6: Smoke production (EF011578)
s2
Reaction-to-fire according to EN 13501-6: Class (EF011577)
Dca
Weight (EF000167)
47
Cable width approx. (EF003796)
7.2 mm
Duplex (EF023003)
No
Cable type (EF000081)
F/UTP
Conductor surface (EF010804)
Bare
Oil resistant according to EN IEC 60811-404 (EF009770)
No
Number of stranding elements (EF001688)
4
With rip cord (EF017088)
No
Suitable for use as security alarm cable (EF017089)
No
Reaction-to-fire according to EN 13501-6: Acidity (EF011580)
a1
Min. permitted bending radius, stationary application/permanent installation (EF011803)
28.5 mm
Min. permitted bending radius, moving...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send LEGRAND / 032756 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.