


INDUSTRIAL COMPONENT DATA

032776 LEGRAND LCS-CABLE C6 F/UTP 8P DCA 500M. Sold in reels of 500 m. The unit price is per meter.

Brand: LEGRAND | Manufacturer Part Number: 032776

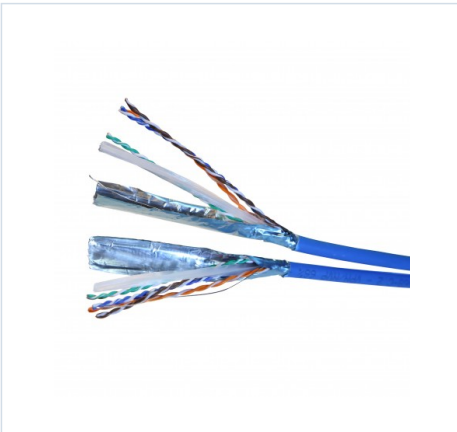

Manufacturer	LEGRAND
MPN / Reference	032776
Catalog number	032776
Category	Data and communication cable
Minimum order	500 m.
Document ID	EO-31C60E0DF4
Generated	2026-08-02

Product Overview

LCS-CABLE C6 F/UTP 8P DCA 500M. Sold in reels of 500 m. The unit price is per meter.

Cable 4 pairs Cat. 6 FTP indoor LSZH 500 m. Supplied in coil. Weight 48 kg

4 pairs Cat.6 FTP cable LSZH cover 500 m. Supplied in coil. Weight 48 kg

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	LEGRAND > VDI CABLES
--------------	----------------------

Additional Product Information

Product features

Cables Cat. 6 Wire 4 or 2 x 4 twisted pairs 100 ? Blue RAL 5015 colour Code EIA/TIA Conform to standards ISO/IEC 11801 edición 2, IN (2017) 50173-1 and EIA/TIA 568C General characteristics

Legrand cabling system LCS3 cables and patch cords

ETIM for 032776 Cable (EC003249)

Feature Name

Feature Value

Protective sheath (EF001691)

None

Halogen free according to EN IEC 60754-2 (EF003792)

Yes

Reaction-to-fire according to EN 13501-6: Flaming droplets/particles (EF011579)

d2

Cable height approx. (EF003797)

7.4 mm

Reaction-to-fire according to EN 13501-6: Smoke production (EF011578)

s2

Reaction-to-fire according to EN 13501-6: Class (EF011577)

Dca

Weight (EF000167)

82

Cable width approx. (EF003796)

7.4 mm

Duplex (EF023003)

No

Cable type (EF000081)

F/UTP

Conductor surface (EF010804)

Bare

Oil resistant according to EN IEC 60811-404 (EF009770)

No

Number of stranding elements (EF001688)

8

With rip cord (EF017088)

No

Suitable for use as security alarm cable (EF017089)

No

Reaction-to-fire according to EN 13501-6: Acidity (EF011580)

a1

Min. permitted bending radius, stationary application/permanent installation (EF011803)

29.5 mm

Min. permitted bending radius, moving application/free movement (EF011802)

60 mm

Min. permitted bending radius, moving application with forced guidance (EF011801)

59 mm

Specification material outer sheath (EF011806)

Polyethylene (PE)

Specification core insulation (EF011805)

Polyethylene (PE)

Circuit integrity according to IEC 60331-23 (EF016619)....

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send LEGRAND / 032776 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.