


INDUSTRIAL COMPONENT DATA

032828 LEGRAND LCS-CABLE C6A U/UTP CCA 500M. Sold in reels of 500 m. The unit price is per meter.

Brand: LEGRAND | Manufacturer Part Number: 032828

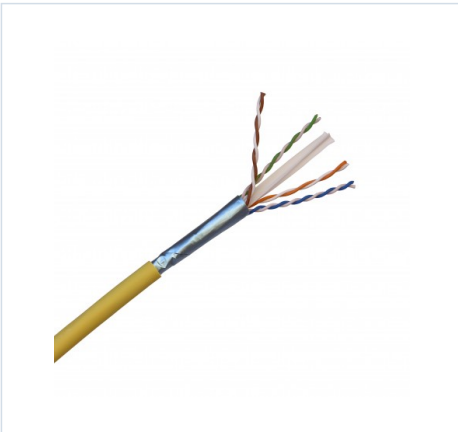

Manufacturer	LEGRAND
MPN / Reference	032828
Catalog number	032828
Category	Data and communication cable
Minimum order	500 m.
Document ID	EO-574210510D
Generated	2026-08-06

Product Overview

LCS-CABLE C6A U/UTP CCA 500M. Sold in reels of 500 m. The unit price is per meter.

Cable for local networks LCS³ category 6A - U/UTP Euroclass Cca - 4 pairs - 500 m

Category 6A U/UTP 4 pairs LSZH Euroclass Cca 305 meters yellow cable

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	LEGRAND > VDI CABLES
--------------	----------------------

Additional Product Information

Pack (number of units)500

Volume (dm3)56.00

Weight (g)42 200.00

Product characteristicsCat. 6A cables for local networks

Performance 500 MHz

4 pairs or 2x4 twisted pair cables, 100 ?

Yellow RAL 1018

LSZH sheath: zero halogen. ANSI/TIA colour code

Compliant with ISO/IEC 11 801, EN 50173 and ANSI/TIA 568 standards

Products conforming to the new CPR regulation (except Cat. No 0 327 87)

U/UTP - 4 pairs

Length 500 m

Supplied on a drum - Weight 34 kg

Euroclass Cca

General characteristics Legrand cabling system, LCS³ cat. 6A and category 7 - cables and cords

ETIM for 032828 Cable (EC003249)

Feature Name

Feature Value

Protective sheath (EF001691)

Al/PE

Halogen free according to EN IEC 60754-2 (EF003792)

Yes

Reaction-to-fire according to EN 13501-6: Flaming droplets/particles (EF011579)

d1

Reaction-to-fire according to EN 13501-6: Smoke production (EF011578)

s1a

Reaction-to-fire according to EN 13501-6: Class (EF011577)

Cca

Weight (EF000167)

64

Duplex (EF023003)

No

Cable type (EF000081)

U/UTP

Conductor surface (EF010804)

Bare

Oil resistant according to EN IEC 60811-404 (EF009770)

No

Number of stranding elements (EF001688)

8

Reaction-to-fire according to EN 13501-6: Acidity (EF011580)

a1

Min. permitted bending radius, stationary application/permanent installation (EF011803)

64 mm

Min. permitted bending radius, moving application/free movement (EF011802)

64 mm

Min. permitted bending radius, moving application with forced guidance (EF011801)

64 mm

Specification material outer sheath (EF0...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send LEGRAND / 032828 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.