


INDUSTRIAL COMPONENT DATA

032849 LEGRAND LCS-CABLE C7 S/FTP CCA 500M. Sold in reels of 500 m. The unit price is per meter.

Brand: LEGRAND | Manufacturer Part Number: 032849

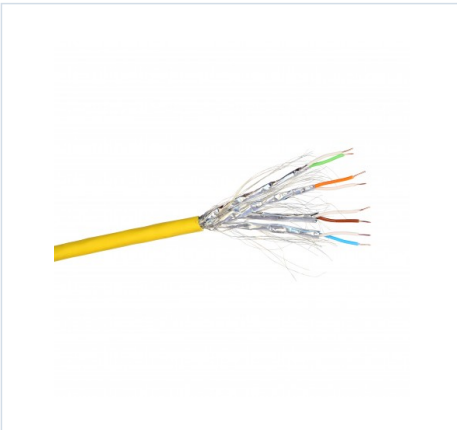

Manufacturer	LEGRAND
MPN / Reference	032849
Catalog number	032849
Category	Data and communication cable
Minimum order	500 m.
Document ID	EO-DA64E95E83
Generated	2026-07-29

Product Overview

LCS-CABLE C7 S/FTP CCA 500M. Sold in reels of 500 m. The unit price is per meter.

LCS-CABLE C7 S/FTP CCA 500M

Cable for local networks LCS³ category 7 - S/FTP Euroclass Cca - 4 pairs - 500 m

Category 7 S/FTP 4 pairs LSZH Euroclass Cca 500 meters yellow cable

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	LEGRAND > VDI CABLES
--------------	----------------------

Additional Product Information

Pack (number of units)500

Volume (dm3)52.80

Weight (g)31 300.00

Product characteristicsCat. 7 cables for local networks

Performance 600 MHz

4 twisted pair cables, 100 ?

LSZH sheath: zero halogen. ANSI/TIA colour code

Compliant with ISO/IEC 11 801 and EN 50173standards

Products conforming to the new CPR regulation

S/FTP - 4 pairs

Length 500 m

Supplied on a drum - Weight 31 kg

Euroclass Cca

General characteristics Legrand cabling system, LCS³ cat. 6A and category 7 - cables and cords

ETIM for 032849 Cable (EC003249)

Feature Name

Feature Value

Protective sheath (EF001691)

None

Halogen free according to EN IEC 60754-2 (EF003792)

Yes

Reaction-to-fire according to EN 13501-6: Flaming droplets/particles (EF011579)

d1

Reaction-to-fire according to EN 13501-6: Smoke production (EF011578)

s1a

Reaction-to-fire according to EN 13501-6: Class (EF011577)

Cca

Weight (EF000167)

62

Duplex (EF023003)

No

Cable type (EF000081)

S/FTP

Conductor surface (EF010804)

Bare

Oil resistant according to EN IEC 60811-404 (EF009770)

Yes

Number of stranding elements (EF001688)

4

Reaction-to-fire according to EN 13501-6: Acidity (EF011580)

a1

Min. permitted bending radius, stationary application/permanent installation (EF011803)

31 mm

Min. permitted bending radius, moving application with forced guidance (EF011801)

62 mm

Specification material outer sheath (EF011806)

Polyethylene (PE)

Specification core insulation (EF011805)

Polyethylene (PE)

Category (EF001619)

7

Approved type of underground installation (EF0...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send LEGRAND / 032849 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.