


INDUSTRIAL COMPONENT DATA**039073 LEGRAND BLOCK POWER 120MM2**

Brand: LEGRAND | Manufacturer Part Number: 039073

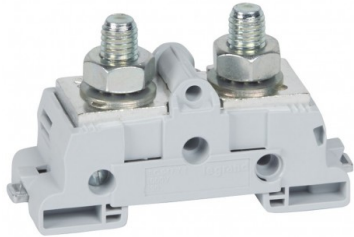

Manufacturer	LEGRAND
MPN / Reference	039073
Catalog number	039073
Category	(Knife) disconnect terminal block
Minimum order	5 Pcs
Document ID	EO-882BD57187
Generated	2026-08-01

Product Overview

BLOCK POWER 120MM2

Viking 3 Heavy Duty Terminal Block Symmetrical DIN Rail Mounting 120mm² Copper Bar/Cable Lug 34mm

Viking 3 power terminal - symmetrical rails - M10 - pitch 34 - L. 25mm

STRUCTURED PRODUCT DATA**Technical Specifications**

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog PathCatalog path **LEGRAND > VIKING TERMINALS****Additional Product Information**

Heavy duty terminal blocks For copper bars or cable lugs Conform to IEC EN 60947-7-1 Fire resistance: 960°C, IEC EN 60695-2-11 V2 according to UL94 Insulating material: polyamide -30°C to +100°C Bridging the gap between the enclosure and external cables Plastic foot For use with terminal marker sheets For symmetrical rails Fixed using metal clip on rails 15mm depth and EN 60715, 15mm depth Connectable conductor cross section fine-strand without cable end sleeve 120-120 mm²

Rated voltage 1000 V

Type of electrical connection 1 Bolt connection

Type of electrical connection 2 Bolt connection

Number of levels 1

Number of clamp positions per level 1

Internally connected stages No

Mounting method DIN rail (top hat rail) 35 mm

Material insulation body Thermoplastic

Operating temperature -5-40 °C

Width 34 mm
Height 61 mm
Depth 84 mm
Closing plate required No
Colour Grey
Inflammability class of insulation material according to UL 94 V2
ETIM for 039073 Terminal blocks (EC000902)
Feature Name
Feature Value
Number of clamp positions per level (EF002660)
1
Internally connected stages (EF002661)
No
Height (EF000040)
61 mm
Inflammability class of insulation material according to UL94 (EF002521)
V2
Material insulation body (EF007543)
Thermoplastic
Mounting method (EF000003)
DIN rail (top hat rail) 35 mm
Connectable conductor cross section fine-strand without cable end sleeve (EF007341)
120 mm²
Operating temperature (EF002393)
-5 °C
Closing plate required (EF002525)
No
Depth (EF000049)
84 mm
Ty...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send LEGRAND / 039073 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.