


INDUSTRIAL COMPONENT DATA

662452 LEGRAND LED HEADLAMP 1500LM 1H NP LVS

Brand: LEGRAND | Manufacturer Part Number: 662452

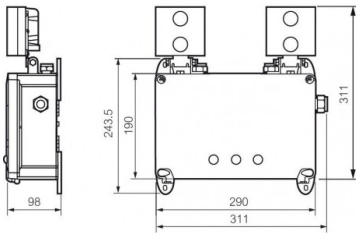

Manufacturer	LEGRAND
MPN / Reference	662452
Catalog number	662452
Category	Emergency luminaire
Minimum order	1 Pcs
Document ID	EO-BA608D5DB3
Generated	2026-07-29

Product Overview

LED HEADLAMP 1500LM 1H NP LVS

Autotest/adressable LED emergency luminaire Twinspot - 2 x 750 lm - 1h

LVS2 LED Projector 1500 lumens - 2 spotlights - IP55

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path **LEGRAND > WATERTIGHT EMERGENCIES**

Additional Product Information

Pack (number of units)1

Volume (dm3)14.07

Weight (g)3 480.00

Product characteristicsAutotest and addressable LED spotlight luminaire - Non-Maintained (NM)

2 x 750 lm - 1h

Incorporates an automatic self-testing system that checks periodically the emergency lighting function:

weekly test of emergency lighting mode

quarterly test of battery duration

Tests result is visible via 2 signalling LEDs (green = OK and yellow = defective) on the luminaire

Addressable function is activated by setting an ID on each luminaire with infrared configuration tool (Cat.No 0 626 10) and

wiring a complementary BUS line

Operating state of all addressable luminaires can be centralized by the control interface Cat.No 0 626 00 and monitored on a local touch screen controller (Cat.No 0 626 01), or with the building's plan on Legrand Vision System (L.V.S. 2) PC software

General characteristicsLED Twinspot emergency lighting luminairesHigh performance LED non maintained emergency lighting luminaires

Certified to IEC and EN 60598-2-22 standards

High power LEDs spotlights with optimized lighting distribution

Low consumption electronic switching power supply

High capacity terminals: 2 x 2.5 mm² - IP 55 - IK 07

Duration: 1, 2 and 3 hours. Ni-Cd batteries. Recharge time: 24h

Green charge indicator with high luminosity LED, to improve visibility from the floor when high installation

Power supply: 230 V~ ± 10% - 50/60 Hz. Class II

Rest mode with remote control device Cat.No 0 039 01 to avoid battery discharge i...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send LEGRAND / 662452 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.