


**INDUSTRIAL COMPONENT DATA**

# NDB-ACC-IWT LEGRAND EMP ADAPTER. NETATMO BELL

Brand: LEGRAND | Manufacturer Part Number: NDB-ACC-IWT

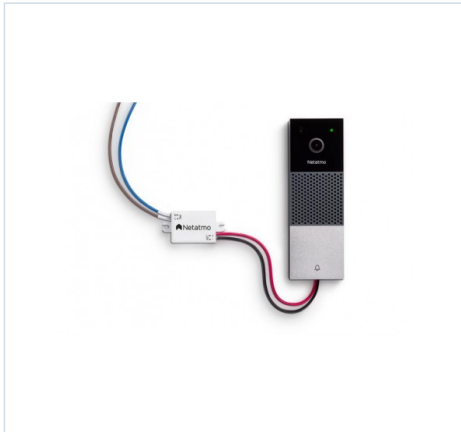

|                 |                  |
|-----------------|------------------|
| Manufacturer    | LEGRAND          |
| MPN / Reference | NDB-ACC-IWT      |
| Catalog number  | NDB-ACC-IWT      |
| Category        | Bell transformer |
| Minimum order   | 1 Pcs            |
| Document ID     | EO-26830C4B74    |
| Generated       | 2026-08-02       |

## Product Overview

EMP ADAPTER. NETATMO BELL

Recessed transformer for Netatmo smart doorbell

**STRUCTURED PRODUCT DATA**

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

|              |                            |
|--------------|----------------------------|
| Catalog path | LEGRAND > DOMOTICS MY HOME |
|--------------|----------------------------|

## Additional Product Information

Allows for simplified bell-free installation of the Netatmo smart doorbell. Recessed installation. With reduced format (25x36x20mm)Primary voltage 240 V

Secondary Voltage 1 12 V

Secondary Current 1 0.33 A

Maximum power output 5 V

Maximum output current 0.33 A

Maximum power loss 5 V

Transformer Type Standard Doorbell Transformer

Surface mounting No

Flush mounting Yes

Suitable for series installation No

Longitude 36 mm

Width 25 mm

Height 20 mm

Width in number of modular spaces 0

Short circuit protected Yes  
With on/off switch No  
Protection Class (IP) Not applicable  
Type of voltage AC/DC  
frequency 50-60 Hz  
Direction of the electricity supply Not applicable  
Display of markings on the connection terminals Yes  
Colour White  
Halogen-free Yes  
Connection Method Not applicable  
Connection type Cable  
Label Space/Print Area No  
ETIM for NDB-ACC-IWT Modular devices for distribution board/surface mounting (EC001547)  
Feature Name  
Feature Value  
Height (EF000040)  
20 mm  
Surface mounting (EF003681)  
No  
Width in number of modular spacings (EF002950)  
0  
Primary voltage (EF003775)  
240 V  
Max. power loss (EF004996)  
4 W  
Secondary voltage 1 (EF003776)  
12 V  
Short-circuit protected (EF003696)  
Yes  
Secondary amperage 1 (EF003779)  
0.330 A  
With on/off switch (EF000488)  
No  
Modular version (EF001126)  
No  
Type of transformer (EF000279)  
Standard bell ringing transformer  
Max. output current (EF001315)  
0.330 A  
Flush-mounted installation (EF007517)  
Yes  
Width (EF000008)  
25 mm  
Length (EF001438)  
36 mm  
Max. output power (EF...

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send LEGRAND / NDB-ACC-IWT with the required quantity to [info@electricaonline.com](mailto:info@electricaonline.com) or use [electricaonline.com/request-quote](https://electricaonline.com/request-quote).

### GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.