


INDUSTRIAL COMPONENT DATA

MKSM 110 A2 6059190 OBO BETTERMANN TRAY MKSMAGIC 110 VA4301

Brand: OBO BETTERMANN | Manufacturer Part Number: MKSM 110 A2

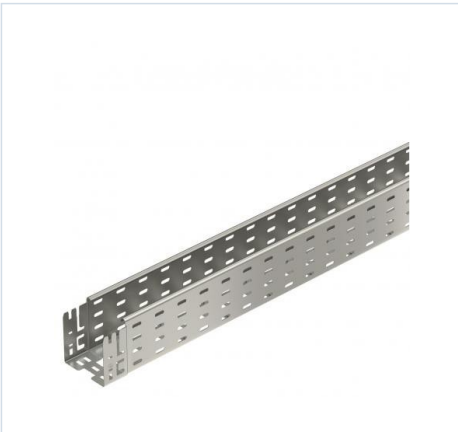

Manufacturer	OBO BETTERMANN
MPN / Reference	MKSM 110 A2
Catalog number	6059190
Category	Cable tray/wide span cable tray
Minimum order	3 m.
Document ID	EO-530D7B67B1
Generated	2026-08-01

Product Overview

TRAY MKSMAGIC 110 VA4301

MKSM MKSM 110 A2 cable tray, perforated, with needle. 110x100x3050 Stainless steel 1.4301, A2, 1.4301, Polished, with post-treatment

Cable tray MKS-Magic® 110 A2. Cable tray with integrated quick fastening system. The usable length of the cable tray is 3,000 mm. The cable tray has continuous side perforations of 7 x 20 mm for the installation of additional connection and mounting components. From a cable tray width of 200 mm with 30% hole surface, suitable for use under sprinkler systems according to VdS guideline 2092.

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	OBO BETTERMANN > KTS cable support systems - OBO BETTERMANN
--------------	---

Additional Product Information

CO2 Footprint (GWP) Cradle-to-Gate 13,2277 kg CO2e / 1 Meter

Colour stainless steel

Connector version Integrated connector

Dimension 110x100x3050

Dimension B 100 mm

Dimension L 30 mm

Dimension y 62 mm

Height 110 mm

Length 3050 mm

Load test type according to IEC 61537 Type II
Magnetic shield insulation with cover 50 dB
Magnetic shield insulation without cover 20 dB
Maintain electrical functions no
Material Stainless steel 1.4301
Mounting perforation in base yes
NATO hole pattern no
Plate thickness 1 mm
Rustproof steel, pickled no
Side perforation yes
Support spacing 1.5 m 2 kN/m
Support spacing 2.0 m 1,5 kN/m
Support spacing 2.5 m 1,07 kN/m
Support spacing 3.0 m 0,7 kN/m
Surface Bright, treated
Type of connector, cable support system Click fastening
Usable cross-section 108 cm²
Usable cross-section 10800 mm²
Usable length 3000 mm
Wide-span version no
Width 100 mm
With cover no

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send OBO BETTERMANN / MKSM 110 A2 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.