


INDUSTRIAL COMPONENT DATA

IKS 610 FS 6087116 OBO BETTERMANN CABLE TRAY IKS 610 FS

Brand: OBO BETTERMANN | Manufacturer Part Number: IKS 610 FS

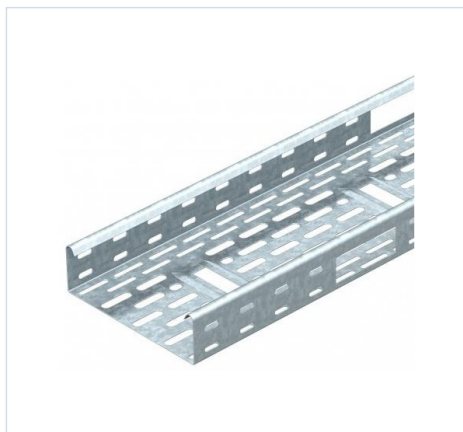

Manufacturer	OBO BETTERMANN
MPN / Reference	IKS 610 FS
Catalog number	6087116
Category	Cable tray/wide span cable tray
Minimum order	3 m.
Document ID	EO-7C9B193050
Generated	2026-08-03

Product Overview

CABLE TRAY IKS IKS 610 FS

IKS energy tray, w/wing pitch nozzle, 60x100x3000, galvanized steel in band, DIN EN 10346

Cable tray IKS 60 FS. IKS 60 = installation cable tray system with 60 mm side height. Magnetic shield insulation without cover 20 dB, with cover 50 dB.

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	OBO BETTERMANN > KTS cable support systems - OBO BETTERMANN
--------------	---

Additional Product Information

CO2 Footprint (GWP) Cradle-to-Gate 4,3254 kg CO2e / 1 Meter

Colour zinc

Connector version Without connectors

Dimension 60x100x3000

Dimension 60 x 100

Dimension B 100 mm

Height 2 in

Height 60 mm

Length 10 ft

Length 3000 mm

Load test type according to IEC 61537 Type II

Maintain electrical functions no

Material Steel
Mounting perforation in base yes
NATO hole pattern no
Plate thickness 1 mm
Plate thickness 0,04 in
Rustproof steel, pickled no
Side perforation yes
Sprinkler system use yes
Support spacing 1.0 m 0,9 kN/m
Support spacing 1.5 m 0,9 kN/m
Support spacing 2.0 m 0,7 kN/m
Support spacing 2.5 m 0,45 kN/m
Surface Strip galvanized
Type of connector, cable support system Screwed
Usable cross-section 58 cm²
Usable cross-section 5800 mm²
Wide-span version no
Width 100 mm
Width 4 in
With cover no
ETIM for 6087116 Cable tray, ladder and wire basket systems (EC000047)
Feature Name
Feature Value
Height (EF000040)
60 mm
Width (EF000008)
100 mm
Material thickness (EF000386)
1 mm
Length (EF001438)
3000 mm
Useful cross section (EF005140)
5800 mm²
With cover (EF007965)
No
Side perforation (EF001122)
Yes
Bottom perforation (EF004545)
Yes
NATO-mounting holes (EF006059)
No
Model (EF000010)
Coupler not included
Type of connector (EF000141)
Screwed
Suitable for circuit integrity (EF007806)
No

Material (EF002169)

Steel

Surface protection (EF000139)

Pre-galvanised

Weight (EF000167)

1.55 kg/m

Load test type according to IEC 61537 (EF015362)

Type II

Possible support spacing (EF017261)

1 m

Safe w...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send OBO BETTERMANN / IKS 610 FS with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.