


INDUSTRIAL COMPONENT DATA

LGVG 60 FT 6208944 OBO BETTERMANN Adjustable connector for cable ladder, 64x210, Hot-dip galvanised, DIN EN ..

Brand: OBO BETTERMANN | Manufacturer Part Number: LGVG 60 FT

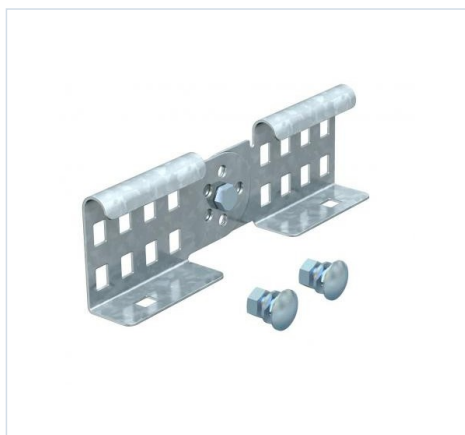

Manufacturer	OBO BETTERMANN
MPN / Reference	LGVG 60 FT
Catalog number	6208944
Category	Connector for cable support system
Minimum order	10 Pcs
Document ID	EO-6B1A6DDEF0
Generated	2026-08-03

Product Overview

Adjustable connector for cable ladder, 64x210, Hot-dip galvanised, DIN EN ISO 1461, Steel, St
Adjustable connector FT. Adjustable connector as external connector to join cable ladders and fittings with a side height of 60 mm and continuous rail perforation. Angle can be adjusted vertically.

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	OBO BETTERMANN > KTS cable support systems - OBO BETTERMANN > Ladder Tray
--------------	---

Additional Product Information

Adjustable connector, horizontal no
Articulated connector, vertical yes
CO2 Footprint (GWP) Cradle-to-Gate 0,8298 kg CO2e / 1 Piece
Colour zinc
Connection type Screw connector
Dimension 64x210
Dimension 64x210
Height 60 mm
Length 210 mm
Material Steel
Plate thickness 1,5 mm

Rustproof steel, pickled no
Suitable for cable ladder yes
Suitable for cable tray no
Suitable for cable tray system height 60 mm
Suitable for mesh cable tray no
Surface Hot-dip galvanised
Version for Straight and angle connector
Width 28 mm

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send OBO BETTERMANN / LGVG 60 FT with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.