


**INDUSTRIAL COMPONENT DATA**

# WKLG 1130 VA4301 6311206 OBO BETTERMANN Wide clamping cable conductor perforated side rail, 110x300x6000, St..

Brand: OBO BETTERMANN | Manufacturer Part Number: WKLG 1130 A2

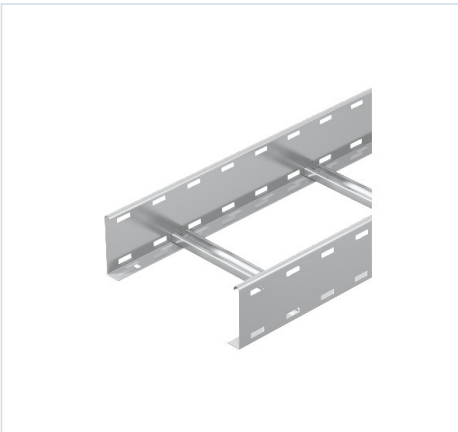

|                 |                                     |
|-----------------|-------------------------------------|
| Manufacturer    | OBO BETTERMANN                      |
| MPN / Reference | WKLG 1130 A2                        |
| Catalog number  | 6311206                             |
| Category        | Cable ladder/wide span cable ladder |
| Minimum order   | 6 m.                                |
| Document ID     | EO-F7BA9A7432                       |
| Generated       | 2026-08-01                          |

## Product Overview

Wide clamping cable conductor perforated side rail, 110x300x6000, Stainless steel, grade 304, VA, 1.4301  
Wide span cable ladder WKLG 110 A2. Wide span cable ladder with perforated side rails of side height of 110 mm.  
Fastening of cables with clamp clip, type 2056. Magnetic shield insulation without cover 10 dB, with cover 15 dB.

**STRUCTURED PRODUCT DATA**

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

|              |                                                                              |
|--------------|------------------------------------------------------------------------------|
| Catalog path | OBO BETTERMANN > KTS cable support systems - OBO BETTERMANN > Tray wide span |
|--------------|------------------------------------------------------------------------------|

## Additional Product Information

CO2 Footprint (GWP) Cradle-to-Gate 29,4486 kg CO2e / 1 Meter  
Colour stainless steel  
Dimension 110x300  
Dimension 110x300x6000  
Dimension B 300 mm  
Dimension L 6000 mm  
Fastening of rung Fully riveted  
Height 110 mm  
Length 6000 mm  
Maintain electrical functions no  
Material Stainless steel 1.4301

Rail thickness 2 mm  
Rung slot dimension 17,00  
Rustproof steel, pickled no  
Side perforation yes  
Side rail version Profile (open)  
Support spacing 3.0 m 2,3 kN/m  
Support spacing 3.5 m 1,9 kN/m  
Support spacing 4.0 m 1,6 kN/m  
Support spacing 4.5 m 1,33 kN/m  
Support spacing 5.0 m 1,1 kN/m  
Support spacing 6.0 m 0,8 kN/m  
Support spacing 7.0 m 0,4 kN/m  
Surface Bright, treated  
Usable cross-section 28100 mm<sup>2</sup>  
Usable cross-section 281 cm<sup>2</sup>  
Version of the rungs Profile perforated  
Wide-span version yes  
Width 300 mm

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send OBO BETTERMANN / WKLG 1130 A2 with the required quantity to [info@electricaonline.com](mailto:info@electricaonline.com) or use [electricaonline.com/request-quote](https://electricaonline.com/request-quote).

### GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.