


**INDUSTRIAL COMPONENT DATA**

# WKSG 166 FT 6098566 OBO BETTERMANN Wide clamping cable duct perforated, floor beaded, 160x600x6000, Hot-dip ..

Brand: OBO BETTERMANN | Manufacturer Part Number: WKSG 166 FT

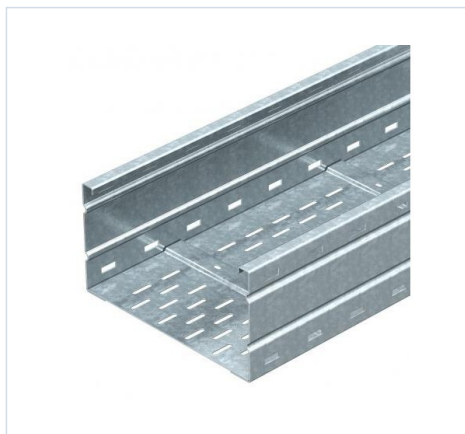

|                 |                                 |
|-----------------|---------------------------------|
| Manufacturer    | OBO BETTERMANN                  |
| MPN / Reference | WKSG 166 FT                     |
| Catalog number  | 6098566                         |
| Category        | Cable tray/wide span cable tray |
| Minimum order   | 6 m.                            |
| Document ID     | EO-88BF07868F                   |
| Generated       | 2026-07-29                      |

## Product Overview

Wide clamping cable duct perforated, floor beaded, 160x600x6000, Hot-dip galvanised, DIN EN ISO 1461, Steel, St  
Wide span cable tray WKSG 160 FT. Wide span cable tray system, perforated, with a side height of 160 mm.Magnetic shield insulation without cover 20 dB, with cover 50 dB.

**STRUCTURED PRODUCT DATA**

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

|              |                                                                              |
|--------------|------------------------------------------------------------------------------|
| Catalog path | OBO BETTERMANN > KTS cable support systems - OBO BETTERMANN > Tray wide span |
|--------------|------------------------------------------------------------------------------|

## Additional Product Information

CO2 Footprint (GWP) Cradle-to-Gate 29,4973 kg CO2e / 1 Meter

Colour zinc

Connector version Without connectors

Dimension 160x600x6000

Dimension 600x6000

Dimension B 600 mm

Dimension L 6000 mm

Height 160 mm

Length 6000 mm

Magnetic shield insulation with cover 50 dB

Magnetic shield insulation without cover 20 dB

Maintain electrical functions no

Material Steel

Mounting perforation in base yes  
Plate thickness 2 mm  
Rustproof steel, pickled no  
Side perforation yes  
Support spacing 3.0 m 3 kN/m  
Support spacing 3.5 m 2,73 kN/m  
Support spacing 4.0 m 2,5 kN/m  
Support spacing 4.5 m 2,24 kN/m  
Support spacing 5.0 m 2 kN/m  
Support spacing 6.0 m 1,6 kN/m  
Support spacing 7.0 m 1,3 kN/m  
Support spacing 8.0 m 1 kN/m  
Surface Hot-dip galvanised  
Type of connector, cable support system Screwed  
Usable cross-section 91400 mm<sup>2</sup>  
Usable cross-section 914 cm<sup>2</sup>  
Usable length 6000 mm  
Wide-span version yes  
Width 600 mm

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send OBO BETTERMANN / WKSG 166 FT with the required quantity to [info@electricaonline.com](mailto:info@electricaonline.com) or use [electricaonline.com/request-quote](https://electricaonline.com/request-quote).

### GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.