


INDUSTRIAL COMPONENT DATA

MKS 640 FT 6055664 OBO BETTERMANN CABLE TRAY MKS MKS 640 FT

Brand: OBO BETTERMANN | Manufacturer Part Number: MKS 640 FT

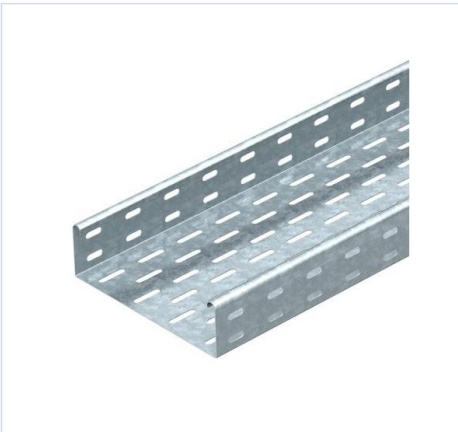

Manufacturer	OBO BETTERMANN
MPN / Reference	MKS 640 FT
Catalog number	6055664
Category	Cable tray/wide span cable tray
Minimum order	3 m.
Document ID	EO-97249327F3
Generated	2026-08-03

Product Overview

CABLE TRAY MKS MKS 640 FT

MKS MKS 640 FT cable tray, perforated 60x400x3000 Steel, St, Hot dip galvanized, DIN EN ISO 1461

Cable tray MKS 60 FT. MKS 60 = Medium-duty cable tray system with a side height of 60 mm.Magnetic shield insulation without cover 20 dB, with cover 50 dB.

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	OBO BETTERMANN > KTS cable support systems - OBO BETTERMANN
--------------	---

Additional Product Information

CO2 Footprint (GWP) Cradle-to-Gate 9,7683 kg CO2e / 1 Meter

Colour zinc

Connector version Without connectors

Dimension 60x400x3000

Dimension 60 x 400

Dimension B 400 mm

Dimension W 400 mm

Height 60 mm

Height 2 in

Length 3000 mm

Length 10 ft

Load test type according to IEC 61537 Type II

Maintain electrical functions no
Material Steel
Mounting perforation in base yes
NATO hole pattern no
Plate thickness 0,04 in
Plate thickness 1 mm
Rustproof steel, pickled no
Side perforation yes
Support spacing 1.5 m 1,5 kN/m
Support spacing 1.75 m 1,25 kN/m
Support spacing 2.0 m 1 kN/m
Support spacing 2.5 m 0,5 kN/m
Surface Hot-dip galvanised
Type of connector, cable support system Screwed
Usable cross-section 238 cm²
Usable cross-section 23800 mm²
Wide-span version no
Width 16 in
Width 400 mm
With cover no
ETIM for 6055664 Cable tray, ladder and wire basket systems (EC000047)
Feature Name
Feature Value
Height (EF000040)
60 mm
Width (EF000008)
400 mm
Material thickness (EF000386)
1 mm
Length (EF001438)
3000 mm
Useful cross section (EF005140)
23800 mm²
With cover (EF007965)
No
Side perforation (EF001122)
Yes
Bottom perforation (EF004545)
Yes
NATO-mounting holes (EF006059)
No
Model (EF000010)
Coupler not included
Type of connector (EF000141)
Screwed
Suitable for circuit integrity (EF007806)
No

Material (EF002169)

Steel

Surface protection (EF000139)

Hot dip galvanized

Weight (EF000167)

4.03 kg/m

Load test type according to IEC 61537 (EF015362)

Type II

Possible support spacing (EF017261)

1.5 m

S...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send OBO BETTERMANN / MKS 640 FT with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.