


INDUSTRIAL COMPONENT DATA

SKSM 130 FT 6059637 OBO BETTERMANN Cable tray SKSM perforated with quick connector, 110x300x3050, Hot-dip ga..

Brand: OBO BETTERMANN | Manufacturer Part Number: SKSM 130 FT

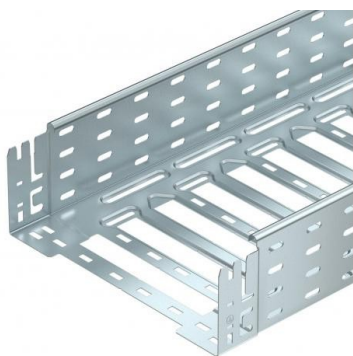

Manufacturer	OBO BETTERMANN
MPN / Reference	SKSM 130 FT
Catalog number	6059637
Category	Cable tray/wide span cable tray
Minimum order	3 m.
Document ID	EO-68A61BC385
Generated	2026-08-02

Product Overview

Cable tray SKSM perforated with quick connector, 110x300x3050, Hot-dip galvanised, DIN EN ISO 1461, Steel, St SKSM SKSM 130 FT cable tray, perforated, plug-in 110x300x3050 Steel, St, Hot-dip galvanized, DIN EN ISO 1461 SKS-Magic® 110 FT Cable Tray. Cable tray with integrated quick fixing system. The usable length of the cable tray is 3,000 mm. La cable tray has a continuous side perforation of 7 x 20 mm for the installation of additional joining and mounting components. From a tray width of 200 mm, with 30% perforation percentage, suitable according to the VdS 2092 standard for use under fire sprinkler systems.

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	OBO BETTERMANN > KTS cable support systems - OBO BETTERMANN > Rest sheet tray
--------------	---

Additional Product Information

Cable tray with quick connection system, including all the relevant connection components for time-saving and economic installation, with beaded straight base perforation, 7 x 79 mm, for bracket mounting. All widths with cross beading for stabilisation and duct ventilation. Continuous side perforation, 7 x 20 mm, as additional connector perforation. From a cable tray width of 200 mm, they are suitable for use under sprinkler systems according to VdS guideline 2092 permeable cable tray system with 30% hole surface. The stock length is 3050 mm, the usable length when combined is 3000 mm. The spring element FED 60 can be ordered separately as an accessory part (spare) for the Magic cable trays of side height 60 mm, 85 mm and 110 mm under the article number 6068859. Continuous equipotential bonding is guaranteed without additional components. VDE-tested cable tray system.

ETIM for 6059637 Cable tray, ladder and wire basket systems (EC000047)

Feature Name

Feature Value

Height (EF000040)

110 mm

Width (EF000008)

300 mm

Material thickness (EF000386)

1.5 mm

Length (EF001438)

3050 mm

Useful cross section (EF005140)

32800 mm²

With cover (EF007965)

No

Side perforation (EF001122)

Yes

Bottom perforation (EF004545)

Yes

NATO-mounting holes (EF006059)

No

Model (EF000010)

Integrated coupler

Type of connector (EF000141)

Click in

Suitable for circuit integrity (EF007806)

No

Material (EF002169)

Steel

Surface protection (EF000139)

Hot dip galvanized

Weight (EF000167)

5.2 kg/m

Load test type accord...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send OBO BETTERMANN / SKSM 130 FT with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.