


**INDUSTRIAL COMPONENT DATA**

# SKSM 150 FS 6059624 OBO BETTERMANN Cable tray SKSM perforated with quick connector, 110x500x3050, Strip-galv..

Brand: OBO BETTERMANN | Manufacturer Part Number: SKSM 150 FS

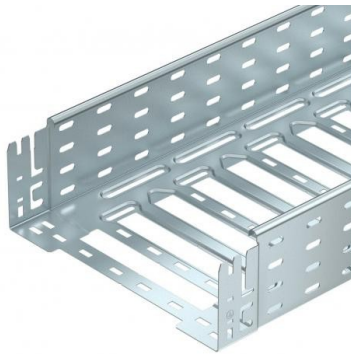

|                 |                                 |
|-----------------|---------------------------------|
| Manufacturer    | OBO BETTERMANN                  |
| MPN / Reference | SKSM 150 FS                     |
| Catalog number  | 6059624                         |
| Category        | Cable tray/wide span cable tray |
| Minimum order   | 3 m.                            |
| Document ID     | EO-3C8AA2A15D                   |
| Generated       | 2026-08-02                      |

## Product Overview

Cable tray SKSM perforated with quick connector, 110x500x3050, Strip-galvanised, DIN EN 10147, Steel, St SKSM SKSM 150 FS cable tray, perforated, plug-in 110x500x3050 Steel, St, strip galvanized, DIN EN 10346 SKS-Magic® 110 FS cable tray. Cable tray with integrated quick fixing system. The usable length of the cable tray is 3,000 mm. La cable tray has a continuous side perforation of 7 x 20 mm for the installation of additional joining and mounting components. From a tray width of 200 mm, with 30% perforation percentage, suitable according to the VdS 2092 standard for use under fire sprinkler systems.

**STRUCTURED PRODUCT DATA**

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

Catalog path **OBO BETTERMANN > KTS cable support systems - OBO BETTERMANN > Rest sheet tray**

## Additional Product Information

Cable tray with quick connection system, including all the relevant connection components for time-saving and economic installation, with beaded straight base perforation, 7 x 79 mm, for bracket mounting. All widths with cross beading for stabilisation and duct ventilation. Continuous side perforation, 7 x 20 mm, as additional connector perforation. From a cable tray width of 200 mm, they are suitable for use under sprinkler systems according to VdS guideline 2092 permeable cable tray system with 30% hole surface. The stock length is 3050 mm, the usable length when combined is 3000 mm The spring element FED 60 can be ordered separately as an accessory part (spare) for the Magic cable trays of side height 60 mm, 85 mm and 110 mm under the article number 6068859. Continuous equipotential bonding is guaranteed without additional components. VDE-tested cable tray system.

ETIM for 6059624 Cable tray, ladder and wire basket systems (EC000047)

Feature Name

**Feature Value**

Height (EF000040)

110 mm

Width (EF000008)

500 mm

Material thickness (EF000386)

1.5 mm

Length (EF001438)

3050 mm

Useful cross section (EF005140)

54800 mm<sup>2</sup>

With cover (EF007965)

No

Side perforation (EF001122)

Yes

Bottom perforation (EF004545)

Yes

NATO-mounting holes (EF006059)

No

Model (EF000010)

Integrated coupler

Type of connector (EF000141)

Click in

Suitable for circuit integrity (EF007806)

No

Material (EF002169)

Steel

Surface protection (EF000139)

Pre-galvanised

Weight (EF000167)

6.03 kg/m

Load test type according...

**REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW**

Send OBO BETTERMANN / SKSM 150 FS with the required quantity to [info@electricaonline.com](mailto:info@electricaonline.com) or use [electricaonline.com/request-quote](https://electricaonline.com/request-quote).

**GLOBAL OFFICES**

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.