


INDUSTRIAL COMPONENT DATA

SKSMU 150 FT 6059863 OBO BETTERMANN Cable tray SKSMU unperf. with quick connector, 110x500x3050, Hot-dip gal..

Brand: OBO BETTERMANN | Manufacturer Part Number: SKSMU 150 FT

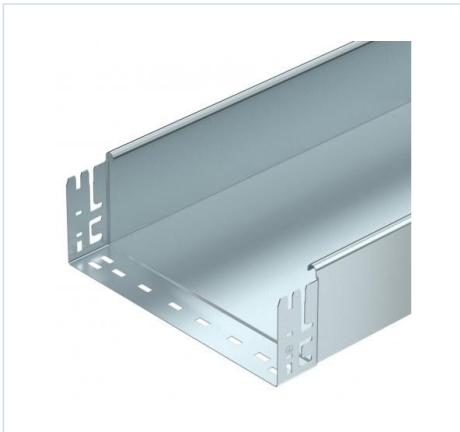

Manufacturer	OBO BETTERMANN
MPN / Reference	SKSMU 150 FT
Catalog number	6059863
Category	Cable tray/wide span cable tray
Minimum order	3 m.
Document ID	EO-913DF03C7A
Generated	2026-08-02

Product Overview

Cable tray SKSMU unperf. with quick connector, 110x500x3050, Hot-dip galvanised, DIN EN ISO 1461, Steel, St SKSMU SKSMU 150 FT cable tray, s/perforate, needle. 110x500x3050 Steel, St, Hot-dip galvanized, DIN EN ISO 1461 Cable tray SKS-Magic® 110, unperforated FT. Unperforated cable tray with integrated quick fastening system. The usable length of the cable tray is 3,000 mm.

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path OBO BETTERMANN > KTS cable support systems - OBO BETTERMANN > Rest sheet tray

Additional Product Information

CO2 Footprint (GWP) Cradle-to-Gate 36,075 kg CO2e / 1 Meter

Colour zinc

Connector version Integrated connector

Dimension 110x500x3050

Dimension B 500 mm

Height 110 mm

Length 3050 mm

Load test type according to IEC 61537 Type II

Maintain electrical functions no

Material Steel

Mounting perforation in base no
NATO hole pattern no
Plate thickness 1,5 mm
Rustproof steel, pickled no
Side perforation no
Support spacing 1.5 m 3 kN/m
Support spacing 2.0 m 2,4 kN/m
Support spacing 2.5 m 1,76 kN/m
Support spacing 3.0 m 1,2 kN/m
Support spacing 3.5 m 0,84 kN/m
Support spacing 4.0 m 0,8 kN/m
Surface Hot-dip galvanised
Type of connector, cable support system Click fastening
Usable cross-section 548 cm²
Usable cross-section 54800 mm²
Usable length 3000 mm
Wide-span version no
Width 500 mm
With cover no
ETIM for 6059863 Cable tray, ladder and wire basket systems (EC000047)
Feature Name
Feature Value
Height (EF000040)
110 mm
Width (EF000008)
500 mm
Material thickness (EF000386)
1.5 mm
Length (EF001438)
3050 mm
Working length (EF006318)
3000 mm
Useful cross section (EF005140)
54800 mm²
With cover (EF007965)
No
Side perforation (EF001122)
No
Bottom perforation (EF004545)
No
NATO-mounting holes (EF006059)
No
Model (EF000010)
Integrated coupler
Type of connector (EF000141)
Click in
Suitable for circuit integrity (EF007806)

No

Material (EF002169)

Steel

Surface protection (EF000139)

Hot dip galvanized

Weight (EF000167)

9.33 kg/m

Load test type according to IEC 61537 (EF015362)

Type II

Possible sup...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send OBO BETTERMANN / SKSMU 150 FT with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.