


INDUSTRIAL COMPONENT DATA

101 ALU-2500 5401852 OBO BETTERMANN Lightning rod with thread, 2500mm, Aluminium, Alu

Brand: OBO BETTERMANN | Manufacturer Part Number: 101 ALU-2500

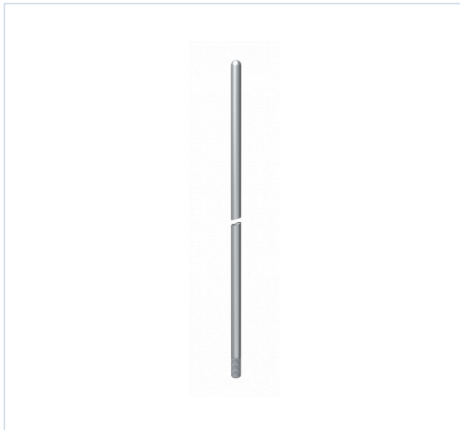

Manufacturer	OBO BETTERMANN
MPN / Reference	101 ALU-2500
Catalog number	5401852
Category	Air-termination equipment for lightning protection
Minimum order	10 Pcs
Document ID	EO-20C9BA397E
Generated	2026-07-31

Product Overview

Lightning rod with thread, 2500mm, Aluminium, Alu

Air-termination rod, one end rounded, M16 thread. • Suitable for wind loads according to Eurocode 1: DIN EN 1991-1-4• From a free length of > 2.5 m, an additional fastening, e.g. insulated spacer is recommended• Ø 16 mm, aluminium• For stand system with M16 internal thread

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	OBO BETTERMANN > TBS Transient and lightning protection systems - OBO BETTERMANN > Surge , external
--------------	---

Additional Product Information

CO2 Footprint (GWP) Cradle-to-Gate 21,0937 kg CO2e / 1 Piece

Connection Round conductor

Dimension 2500mm

Dimension L 2500 mm

High voltage-resistant, insulated version no

Length 2500 mm

Material Aluminium

Nominal size Ø 16 mm

Version for Air-termination rod with thread

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send OBO BETTERMANN / 101 ALU-2500 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.