


INDUSTRIAL COMPONENT DATA

101 VL2500 5401986 OBO BETTERMANN Lightning rod tapered, 2500mm, Aluminium, Alu

Brand: OBO BETTERMANN | Manufacturer Part Number: 101 VL2500

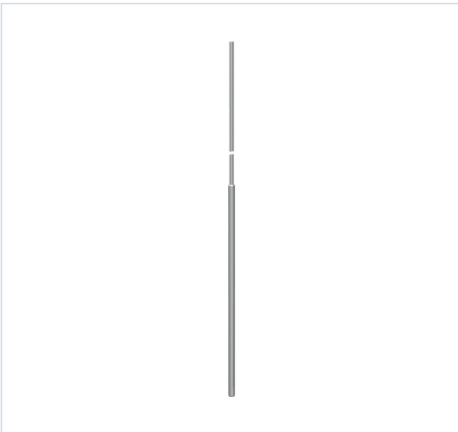

Manufacturer	OBO BETTERMANN
MPN / Reference	101 VL2500
Catalog number	5401986
Category	Air-termination equipment for lightning protection
Minimum order	1 Pcs
Document ID	EO-C2D02EA6F0
Generated	2026-07-28

Product Overview

Lightning rod tapered, 2500mm, Aluminium, Alu

Tapered pipe air-termination rod. • Suitable for wind loads according to Eurocode 1: DIN EN 1991-1-4• From a free length of > 2.5 m, an additional fastening, e.g. insulated spacer is recommended• Last metre is tapered from Ø 16 mm to Ø 10 mm, material: AlMgSi• Matches stand system FangFix

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	OBO BETTERMANN > TBS Transient and lightning protection systems - OBO BETTERMANN > Surge , external
--------------	---

Additional Product Information

CO2 Footprint (GWP) Cradle-to-Gate 8,3205 kg CO2e / 1 Piece

Connection Round conductor

Diameter 16 mm

Dimension 2500mm

High voltage-resistant, insulated version no

Length 2500 mm

Material Aluminium

Nominal size Ø 10/16 mm

Version for Tapered air-termination rod

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send OBO BETTERMANN / 101 VL2500 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.