


INDUSTRIAL COMPONENT DATA

108 B DIN 5416566 OBO BETTERMANN Terminal , 8-10mm, Hot-dip galvanised, DIN EN ISO 1461, Steel, St

Brand: OBO BETTERMANN | Manufacturer Part Number: 108 B DIN

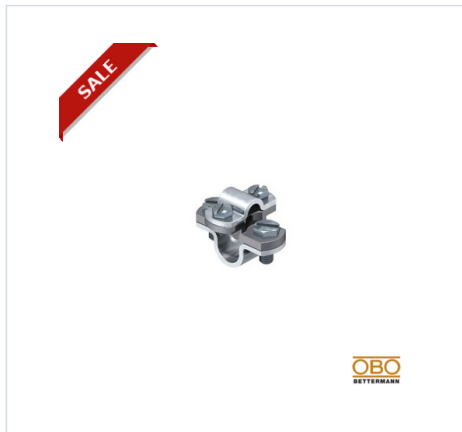

Manufacturer	OBO BETTERMANN
MPN / Reference	108 B DIN
Catalog number	5416566
Category	Connector for lightning protection
Minimum order	10 Pcs
Document ID	EO-1ADEF3AA34
Generated	2026-07-29

Product Overview

Terminal , 8-10mm, Hot-dip galvanised, DIN EN ISO 1461, Steel, St

Rod clamp. • Rod clamp for connecting round conductors Rd 8–10 to connector rods Rd 16 • Mounted with 2 hexagonal bolts M8 x 16 and M6 x 12 • Adapter from malleable iron • Crossbar and bolts from hot dip galvanized steel

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path **OBO BETTERMANN > TBS Transient and lightning protection systems - OBO BETTERMANN > Surge , external**

Additional Product Information

CO2 Footprint (GWP) Cradle-to-Gate 0,2078 kg CO2e / 1 Piece

Dimension 8-10mm

Fit Rd 8-10/16 mm

Intermediate plate no

Lightning current carrying capacity N/50 kA

Material cast steel

Suitable for connection Round conductor Rd 8-10 / Rd 16

Surface Hot-dip galvanised

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send OBO BETTERMANN / 108 B DIN with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.