


INDUSTRIAL COMPONENT DATA

166 LS 70 5226570 OBO BETTERMANN Cable fixing device with pin, 70mm, Hot-dip galvanised, DIN EN ISO 1461, St..

Brand: OBO BETTERMANN | Manufacturer Part Number: 166 LS 70

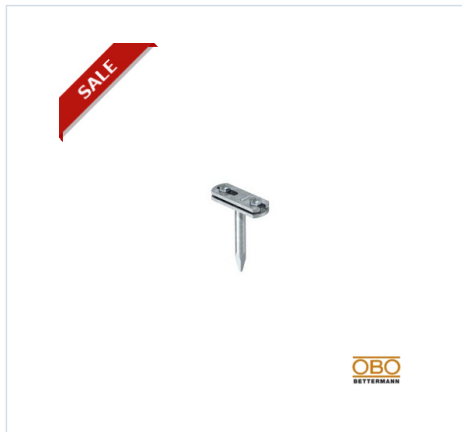

Manufacturer	OBO BETTERMANN
MPN / Reference	166 LS 70
Catalog number	5226570
Category	Conductor holder for lightning protection
Minimum order	50 Pcs
Document ID	EO-4335D7C458
Generated	2026-08-01

Product Overview

Cable fixing device with pin, 70mm, Hot-dip galvanised, DIN EN ISO 1461, Steel, St
Cable bracket for flat conductors, with round pin. • With crossbar and 2 hexagonal bolts (VA)• With loose round pin Ø 9 mm

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	OBO BETTERMANN > TBS Transient and lightning protection systems - OBO BETTERMANN > Surge , external
--------------	---

Additional Product Information

Cable dimensions 30 x 4 mm flat
CO2 Footprint (GWP) Cradle-to-Gate 0,268 kg CO2e / 1 Piece
Conductor fastening type With screw clip
Dimension 70mm
Fit FL30 mm
High voltage-resistant, insulated version no
Holder fastening type With impact pin
Length 70 mm
Material Steel
Material of the base Steel
Material of the crossbar Steel
Material of the holder Steel
Surface Hot-dip galvanised
Use in Ex area yes

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send OBO BETTERMANN / 166 LS 70 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.