


INDUSTRIAL COMPONENT DATA

OKA-W40010050D9 7424740 OBO BETTERMANN Flushfloor trunking unit for service unit GES9, 2400x400x100, Strip-g..

Brand: OBO BETTERMANN | Manufacturer Part Number: OKA-W40010050D9

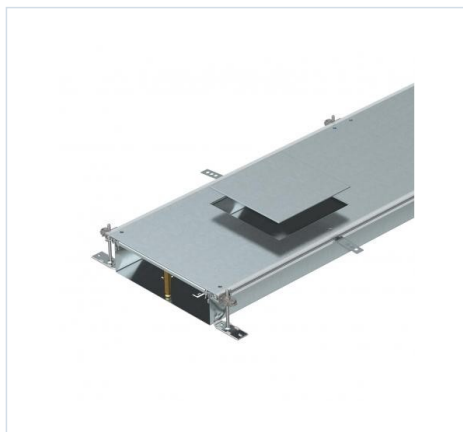

Manufacturer	OBO BETTERMANN
MPN / Reference	OKA-W40010050D9
Catalog number	7424740
Category	Underfloor installation duct flush floor open
Minimum order	2 Pcs
Document ID	EO-B04D6FA009
Generated	2026-08-03

Product Overview

Flushfloor trunking unit for service unit GES9, 2400x400x100, Strip-galvanised, DIN EN 10147, Steel, St
OKA-W40010050D9 pavement flush channel, for conj. portam. GES9 2400x400x100 Steel, St, strip galvanized, DIN EN 10346

Trunking unit for GES9, height 100–150 mm. Ready-to-mount trunking unit with three or six device installation lids for cable laying and the installation of installation units of nominal size 9, consisting of the trunking base (floor trough with side and floor covering guide profiles) and trunking lid with blank mounting opening. Floor trough with holding shackles for self-contacting mounting of dividers. The scope of supply contains six height-adjustable wall fixing brackets, six screed anchors and three height-adjustable cover joint supports for nominal trunking width 400 or six height-adjustable cover joint supports for nominal trunking widths 500 and 600. Trunking lid screwed down when delivered.

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	OBO BETTERMANN > UFS Underfloor piping systems - OBO BETTERMANN > Other
--------------	---

Additional Product Information

CO2 Footprint (GWP) Cradle-to-Gate 79,8447 kg CO2e / 1 Meter

Cover fastening, locking no

Cover material thickness 4

Covers 3

Decouplable yes

Dimension 2400x400x100

Duct height, min. 100 mm

Floor plate yes
Height-adjustment range, max. 150 mm
Height-adjustment range, min. 100 mm
Installation opening for on-floor tank no
Length 2400 mm
Material Steel
Minimum screed height 100
Mounting opening For service outlet
Mounting opening Square
Mounting opening cover yes
Nominal size for device installation units 9
Number of compartments 3 St.
Number of insertable partitions 2
Number of planned flush-mount units 3
Removable cover yes
Seal installation option yes
Separating retainer fastening Plug
Suitable for expansion joint no
Surface Strip galvanized
Trunking height, max. 150 mm
Width 400 mm
With connection opening yes
With equipotential bonding no
With overhang yes
With separating retainer no

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send OBO BETTERMANN / OKA-W40010050D9 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.