
INDUSTRIAL COMPONENT DATA

AB-PTI 16-NLS RD 1030140 PHOENIX CONTACT Easel, length: 81,9 mm, width: 12,2 mm height: 46,8 mm, color: red

Brand: PHOENIX CONTACT | Manufacturer Part Number: AB-PTI 16-NLS RD

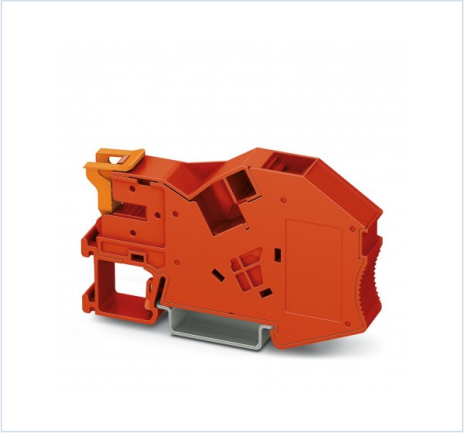

Manufacturer	PHOENIX CONTACT
MPN / Reference	AB-PTI 16-NLS RD
Catalog number	1030140
Category	Busbar support
Minimum order	10 Pcs
Document ID	EO-286DBFEE14
Generated	2026-11-19

Product Overview

Easel, length: 81,9 mm, width: 12,2 mm; height: 46,8 mm, color: red
Support bracket, depth: 46.8 mm, width: 12.2 mm, height: 81.9 mm, color: red

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > Modular TBs

Additional Product Information

Technical dataNotesNote on application with end bracket function
Product propertiesProduct type Support bracket
Data management status
Article revision 00
DimensionsWidth 12.2 mm
Height 81.9 mm
Depth 46.8 mm
Depth on NS 35/7,5 48.5 mm
Depth on NS 35/15 56 mm
Material specificationsColor red (RAL 3001)
Material PA
Flammability rating according to UL 94 V0
Static insulating material application in cold -60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) 125 °C

Relative insulation material temperature index (Elec., UL 746 B) 125 °C
Environmental and real-life conditionsAmbient conditions
Ambient temperature (operation) -60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport) -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly) -5 °C ... 70 °C
Ambient temperature (actuation) -5 °C ... 70 °C
Permissible humidity (storage/transport) 30 % ... 70 %

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / AB-PTI 16-NLS RD with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.