
INDUSTRIAL COMPONENT DATA

BCP-350-10 GY BD:35-44 5454090 PHOENIX CONTACT PCB connector

Brand: PHOENIX CONTACT | Manufacturer Part Number: BCP-350-10 GY BD:35-44

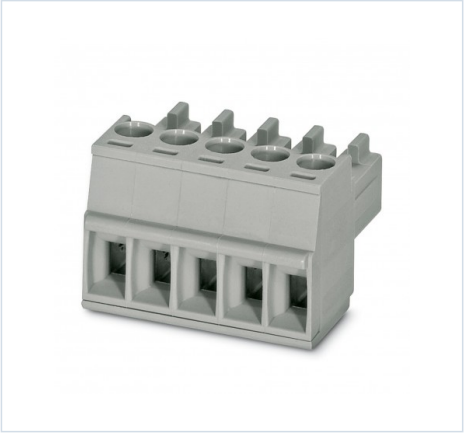

Manufacturer	PHOENIX CONTACT
MPN / Reference	BCP-350-10 GY BD:35-44
Catalog number	5454090
Category	Cable connector
Minimum order	100 Pcs
Document ID	EO-C3EF0EB950
Generated	2026-11-18

Product Overview

PCB connector
Connector for printed circuit board, nominal section: 1.5 mm², color: signal gray, nominal current: 8 A, dimensioning voltage (III/2): 160 V, contact surface: Tin, contact type: Connection female, Number of potentials: 10, Number of rows: 1, Number of poles per row: 10, number of connections: 10, article family: BCP, pitch: 3.5 mm, connection type: Screw connection with traction capsule, conductor connection direction/printed circuit board: 0 °, Stecksystem: BASICLINE 1.5, Lock: without, packaging type: boxed
Printed circuit board connector, nominal cross-section: 1.5 mm2, nominal current: 8 A, nominal voltage (III/2): 160 V, contact surface: Sn, contact connection type: Female, number of potentials: 10, number of rows: 1, number of poles: 10, number of connections: 10, article family: BCP, pitch: 3.5 mm, connection type: Screw connection with traction capsule, screw clamping form: L Longitudinal slot, conductor/printed circuit board connection direction: 0 °, plug-in system: BASICLINE 1.5, lock: without, fixing type: without, packaging type: boxed

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > PCB Connectors (PCC)

Additional Product Information

Key Commercial Data
Orderkey 5454090
Packing unit 100 pc
Minimum order quantity 100 pc
Note Made to Order (non-returnable)

GTIN 4046356948791
Weight per Piece (excluding packing) 6.600 g
Custom tariff number 85366990
Country of origin CN (China)
Dimensions
Length [l] 16.1 mm
Width [w] 35.7 mm
Height [h] 11.1 mm
Pitch 3.5 mm
Dimension a 31.5 mm
General
Range of articles BCP
Number of positions 10
Connection method Screw connection with tension sleeve
Rated voltage (III/3) 160 V
Connection in acc. with standard EN-VDE
Nominal current IN 8 A
Nominal cross section 1.5 mm²
Connection data
Conductor cross section solid min. 0.2 mm²
Conductor cross section solid max. 1.5 mm²
Conductor cross section flexible min. 0.2 mm²
Conductor cross section flexible max. 1.5 mm²
Conductor cross section flexible, with ferrule without plastic sleeve min. 0.25 mm²
Conductor cross section flexible, with ferrule without plastic sleeve max. 1.5 mm²
Conductor cross section flexible, with ferrule with plastic sleeve min. 0.25 mm²
Conductor cross section flexible, with ferrule with plastic sleeve max. 0.5 mm²
Conductor cross section AWG min. 24
Conductor cross section AWG max. 16
2 conductors with same cross section, solid min. 0.2 mm²
2 conductors with same cross section, solid max. 0.5 mm²
2 conductors with same cross section, stranded min. 0.25 mm²
2 conductors with same cross section, stranded max. 0.75 mm²
2 conductors with same cross section, stranded, ferrules without plastic sleeve, min. 0....

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / BCP-350-10 GY BD:35-44 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.