
INDUSTRIAL COMPONENT DATA

# MC-3/7-MULTI-67-PV-LG 1415234 PHOENIX CONTACT Cable feed-through plates

**Brand: PHOENIX CONTACT | Manufacturer Part Number: MC-3/7-MULTI-67-PV-LG**

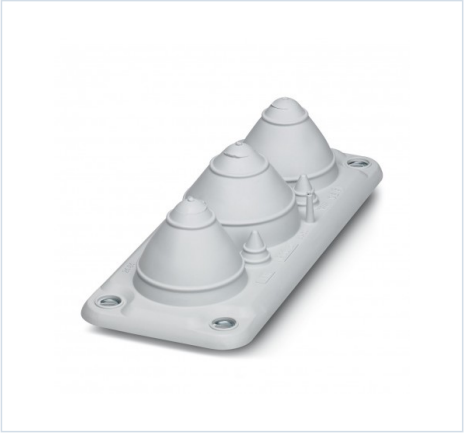

| | |
|---|---|
| Manufacturer | PHOENIX CONTACT |
| MPN / Reference | MC-3/7-MULTI-67-PV-LG |
| Catalog number | 1415234 |
| Category | Mounting plate for cable support system |
| Minimum order | 1 Pcs |
| Document ID | EO-873DBE1B34 |
| Generated | 2026-11-19 |

## Product Overview

Cable feed-through plates
Plates for cable passage, number of conductors: 7, outer diameter of the cable: 1x 30 mm ... 60 mm, 4x 10 mm... 14 mm, 2x 24 mm... 54 mm, material: galvanized steel sheet (Core), material: TPE-SEBS (outer material), color: light gray, length: 222 mm, width: 92 mm, height: 43 mm
Cable feed-through plates, no. of conductors: 7, external cable diameter: 1x 30 mm ... 60 mm, 4x 10 mm ... 14 mm, 2x 24 mm ... 54 mm, material: galvanized sheet steel (Core), material: TPE-SEBS (external material), color: light gray, length: 222 mm, width: 92 mm, height: 43 mm

STRUCTURED PRODUCT DATA

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

| | |
|---|---|
| Catalog path | PHOENIX CONTACT > Industrial plug-in connectors/interfaces |

## Additional Product Information

Technical dataNotesGeneral incl. mounting screws
General 2 mm thick coated, galvanized sheet steel
Product propertiesProduct type Cable feed-through
No. of conductors 7
Data management status
Article revision 00
Connection dataExternal cable diameter 1x 30 mm ... 60 mm
Tightening torque 1.5 Nm ... 2 Nm (Mounting screws)
DimensionsDimensional drawing

Width 92 mm
Height 43 mm
Length 222 mm
Drill hole distance, horizontal 62 mm
Drill hole distance, vertical 194 mm
Hole diameter 8.5 mm
Material specificationsColor light gray (RAL 7035)
Material interior galvanized sheet steel (Core)
Material exterior TPE-SEBS (external material)
Flammability rating according to UL 94 V0
Cable/lineExternal cable diameter 30-60 mm 1x 30 mm ... 60 mm
External cable diameter 10-14 mm 4x 10 mm ... 14 mm
External cable diameter 24-54 mm 2x 24 mm ... 54 mm
Environmental and real-life conditionsAmbient conditions
Degree of protection IP66 (Minimum sheet thickness >= 2.5 mm)
IP67 (Minimum sheet thickness >= 2.5 mm)
Ambient temperature (operation) -40 °C ... 100 °C
MountingAssembly note M8 mounting screw, torque: 1.5 - 2.0 Nm, SW5 Allen key
The mounting screws included should be used for assembly.
Assembly steps:
1) Fix Multigates with the mounting screws provided (observe torque)
2) Make a hole in the membrane (with a screwdriver) or cut off the tip of the cone
3) Guide the cable through the opening (from the outside). Withdraw the cable approximately 20 mm (to improve strain relief).

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / MC-3/7-MULTI-67-PV-LG with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

**GLOBAL OFFICES**

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.