
INDUSTRIAL COMPONENT DATA

# UC-WMTBA (60X11) YE 0820471 PHOENIX CONTACT Cable marker

**Brand: PHOENIX CONTACT | Manufacturer Part Number: UC-WMTBA (60X11) YE**

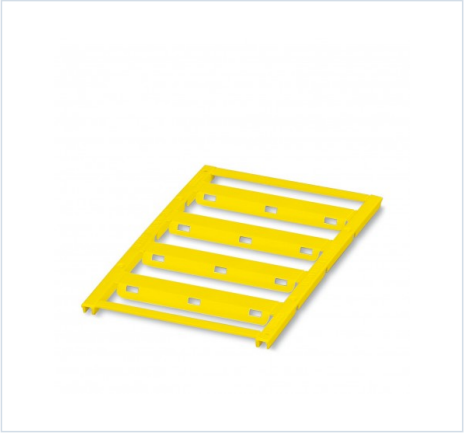

| | |
|---|---|
| Manufacturer | PHOENIX CONTACT |
| MPN / Reference | UC-WMTBA (60X11) YE |
| Catalog number | 0820471 |
| Category | Cable coding system |
| Minimum order | 10 Pcs |
| Document ID | EO-B8777666B1 |
| Generated | 2026-11-18 |

## Product Overview

Cable marker
Cable marker, Mat, yellow, unlabelled, labelable with: BLUEMARKIDCOLOR, BLUEMARKID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting class: Mounting with cable ties, cable diameter range: 6 ... 136 mm, usable area: 60 x 11 mm, Number of individual indexes: 4
Cable marker, Mat, yellow, unlabelled, labelled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting class: Cable tie mounting, cable diameter range: 6 ... 136 mm, cable diameter: > 6 mm, Number of individual indexes: 4, text field height: 11 mm, text field width: 60 mm

STRUCTURED PRODUCT DATA

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

| | |
|---|---|
| Catalog path | PHOENIX CONTACT > MS Material |

## Additional Product Information

Key Commercial Data
Orderkey 0820471
Packing unit 10 pc
Minimum order quantity 10 pc
Catalog page Page 213 (C-3-2017)
GTIN 4046356286114
Weight per Piece (excluding packing) 9.390 g
Custom tariff number 39269097
Country of origin PL (Poland)

Dimensions
Length (b) 60 mm
Width (a) 16.6 mm
Ambient conditions
Ambient temperature (operation) -40 °C ... 120 °C
Recommended storage conditions 23 °C/50 % relative humidity. Storage in a dry and dark place in the original packaging is recommended.
General
Color yellow
Type Card form
Components free from silicone and halogen
Flammability rating according to UL 94 V2
Material PA
RoHS compliant Yes
Wipe resistance DIN EN 61010-1 (VDE 0411-1)
Number of individual labels 4
Number of individual labels per row 1
Printability UV LED technology
Device 5147999 BLUEMARK CLED
Test for substances that would hinder coating with paint or varnish VW PV 3.10.7:2005-02
Result Test passed
Test specification weathering-resistance Following ISO 4892-2:2013-03
Test duration 96 h
Wipe resistance test result Test passed
Salt spray test specification DIN EN 60068-2-11:2000-02
Test duration 96 h
Salt spray testing result Test passed
Wipe resistance of test specification inscriptions DIN EN 61010-1 (VDE 0411-1):2011-07
Result Test passed
Marking mounting type Assembly with cable binders
Result Test passed
Oxygen index (DIN EN ISO 4589-2) 28,2%
Class I 3
Class F 2
R22 HL 1 - HL 2
R23 HL 1 - HL 2
R24 HL 1 - HL 2
Standards and Regulations
Wipe resistance DIN EN 610...

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / UC-WMTBA (60X11) YE with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

**GLOBAL OFFICES**

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.